Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

created: 01.11.2019 / 02


article GLY.PXG 102001.5 F **Art-No.** 26605 **brand** **weight/kg** 0.002

remark All data according to manufacturer catalog.

description

GLY.PXG	Design
F	Sliding layer, maintenance-free

dimensions and tolerances

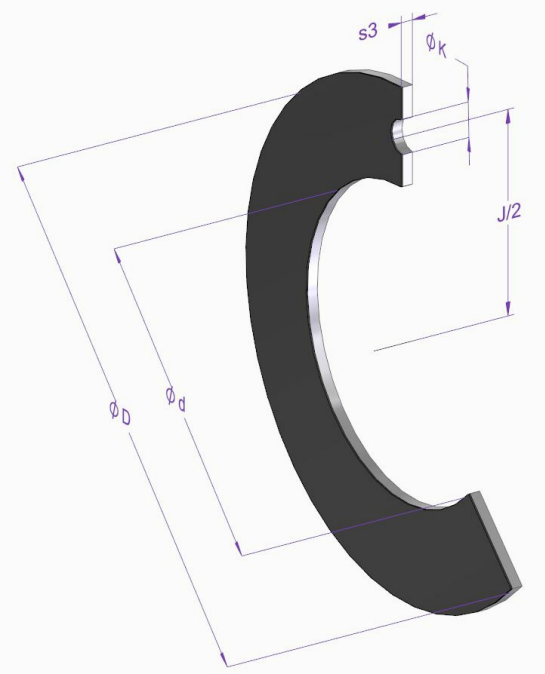

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	10	0 / 250	6525
D	nominal outer diameter	20	-250 / 0	WERKSNORM
J	pitch diameter	15	-120 / 120	WERKSNORM
K	hole diameter	1.75	-125 / 125	WERKSNORM
s3	wall thickness	1.5	-50 / 0	WERKSNORM

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	24000			75000	

operating temperature	max. [°C]	min. [°C]
	-200	250

material specification

description	material	DIN/ISO	hardness
Slide coating	PTFE		
Supporting material	Bronze - Powder		
Washer	Sheet steel		
Outside coating	Copper - Tin		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.