Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

# data sheet

## general data/description


created: 19.12.2019 / 01 page: 1 / 1

**article** GLY.PXG 264401.5 F **Art-No.** 34566 **brand** SKA **weight/kg** 0.01

**description**

| | |
|---|---|
| GLY.PXG | Design |
| 264401.5 | thrust washers |
| F | Sliding layer, maintenance-free |

## dimensions and tolerances

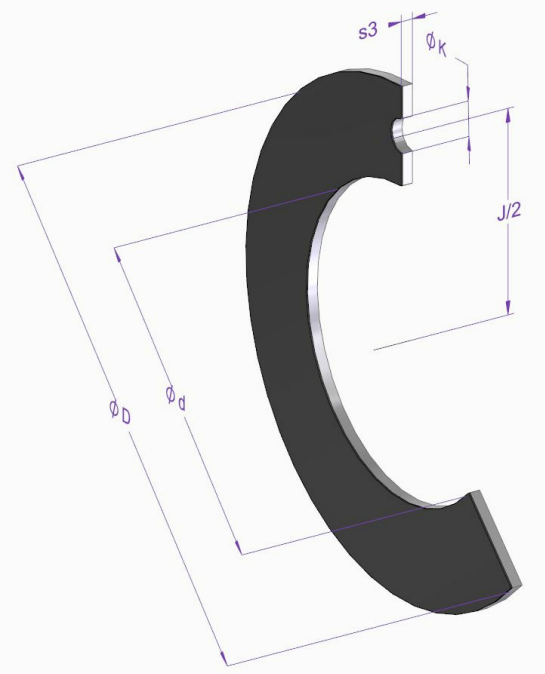


| dimension | Description | [mm] | tolerance [µm] | DIN/ISO |
|---|---|---|---|---|
| d | nominal inner diameter | 26 | 0 / 250 | 6525 |
| D | nominal outer diameter | 44 | -250 / 0 | 6525 |
| J | pitch diameter | 35 | -150 / 150 | 6525 |
| K | hole diameter | 3 | 100 / 400 | 6525 |
| s3 | wall thickness | 1.5 | -60 / -10 | WERKSNORM |
| v max. [m/s] | Sliding speed | 2 | | |

## calculation and operating data

| load ratings | dynamic C [N] | fatique load limit load Cu [N] | DIN/ISO | static Co [N] | DIN/ISO |
|---|---|---|---|---|---|
| | 78000 | | | 245000 | |

| operating temperature | max. [°C] | min. [°C] |
|---|---|---|
| | 250 | -195 |

## material specification

| description | material | DIN/ISO | hardness |
|---|---|---|---|
| Slide coating | PTFE | | |
| Supporting material | Bronze - Powder | | |
| Washer | Sheet steel | | |
| Outside coating | Copper - Tin | | |

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.