Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

general data/description

created: 08.12.2023 / 10

article PCJT 40 HA2 **Art-No.** 38599 **brand** SKA **weight/kg** 1.54

description


PCJT Design
40 Size

remark Rotational speed is reference value for shaft tolerance h7. Also depending on load and seal.

greasing

HA2 HANGU2#, GREAT WALL MOTOR BEARING GREASE

dimensions and tolerances

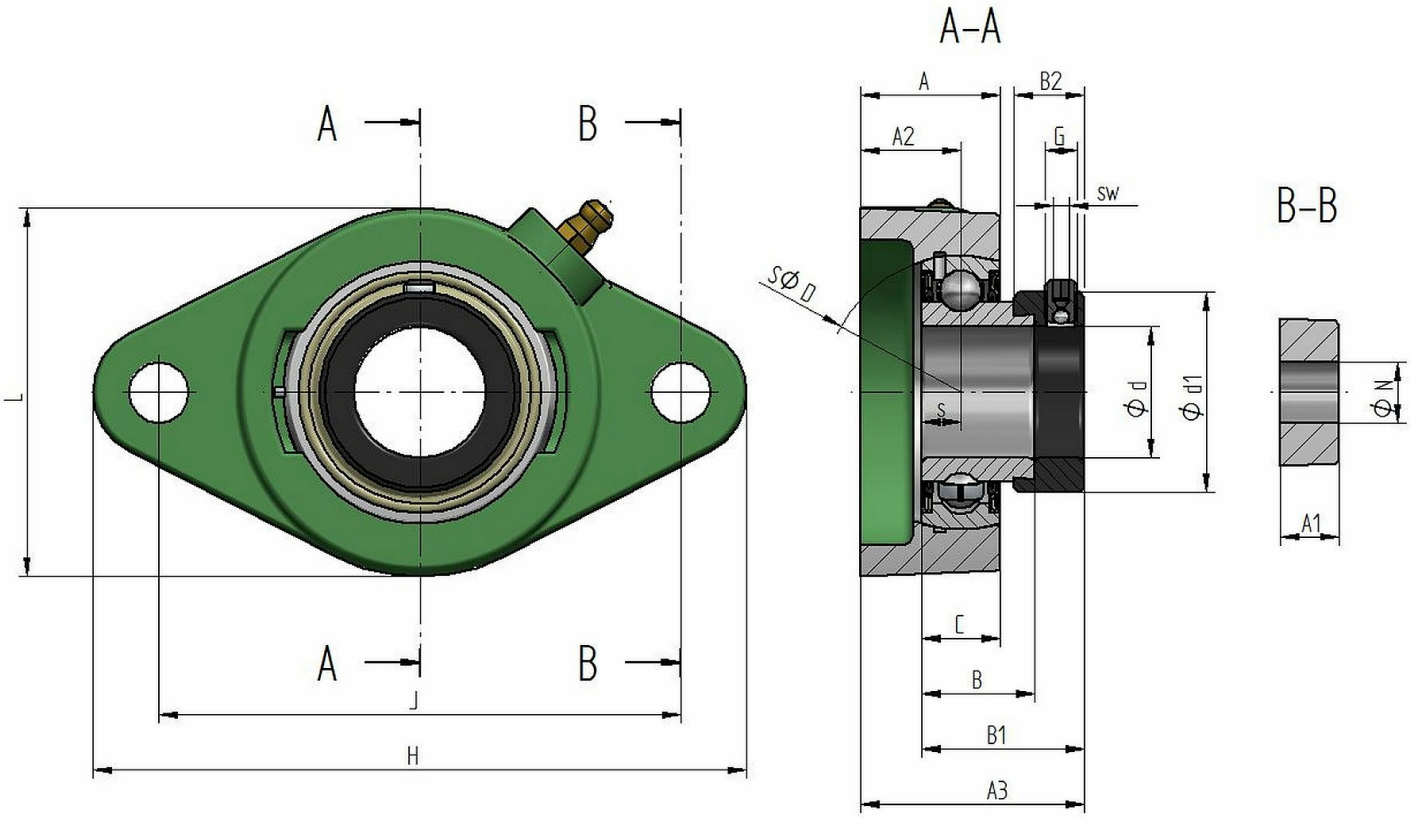

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	40	0 / 21	626-1
D	nominal outer diameter	80	0 / -13	620-2
B	inner ring width	30.2		626-1
B1	total width inner ring	43.9		626-1
B2	clamping ring width	18.3		626-1
C	outer ring width	18		626-1
S	swing axle distance	11		626-1
A	housing height	34.5		626-2
A1	flange thickness	13		626-2
A2	effect distance	24	-200 / 200	626-2
A3	total width	56.7		
d1	clamping ring outer diameter	60.3		626-1
J	hole spacing	143.5		626-2
H	housing length	172		626-2
L	housing width	105		626-2
N	hole diameter	14		626-2
G	thread	M8x1		
sw	wrench size	4		

article PCJT 40 HA2 **Art-No.** 38599

calculation and operating data

load ratings	**dynamic C [N]**	**fatique load limit load Cu [N]**		**DIN/ISO**	**static Co [N]**	**DIN/ISO**
	29500	940		281	18100	76
speed of rotation limit	**reference n [1/min]**	**grease n [1/min]**	**oil n [1/min]**			
		3000				
operating temperature	**max. [°C]**	**min. [°C]**				
	120	-20				
bearing clearance	**radial min. [µm]**	**max. [µm]**				
	15	33				

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-65
Cage	Sheet steel		
Seals	Sheet steel/NBR		
Clamping ring	C45		
Housing	GG20		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.