Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description


created: 19.12.2019 / 01

article GLY.PXG 426601.5 F **Art-No.** 42564 **brand** SKA **weight/kg** 0.022

description

GLY.PXG	Design
426601.5	Size
F	Sliding layer, maintenance-free

dimensions and tolerances

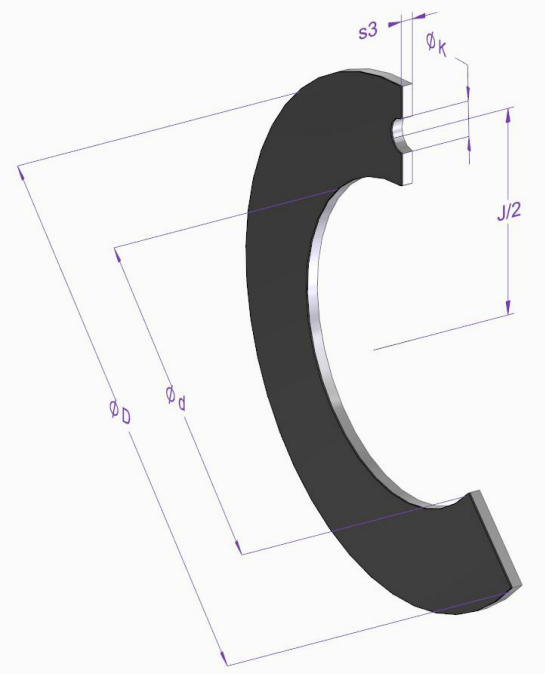

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	42	0 / 250	WERKSNORM
D	nominal outer diameter	66	-250 / 0	WERKSNORM
J	pitch diameter	54	-125 / 125	WERKSNORM
K	hole diameter	4	100 / 400	WERKSNORM
s3	wall thickness	1.5	-60 / -10	WERKSNORM
v max. [m/s]	Sliding speed	2		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	163000			510000	

operating temperature	max. [°C]	min. [°C]
	250	-195

material specification

description	material	DIN/ISO	hardness
Slide coating	PTFE		
Supporting material	Bronze - Powder		
Washer	Sheet steel		
Outside coating	Copper - Tin		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.