Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description


created: 21.04.2016 / 04 page: 1 / 1

article NUP 2212 E TVP2 **Art-No.** 43500 **brand** SKA **weight/kg** 1.07

description

NUP	Design
2212	Size
E	Reinforced version
TVP2	Plastic cage

dimensions and tolerances

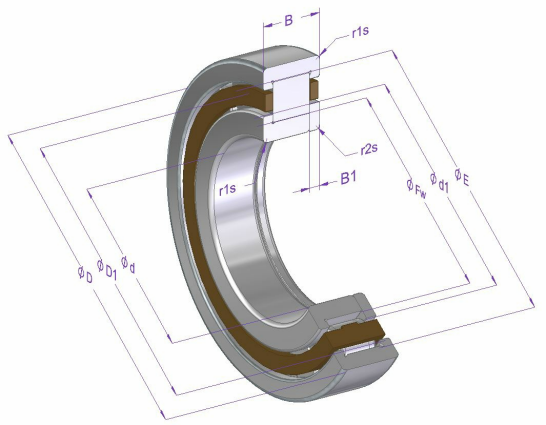

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	60	0 / -15	620-2
D	nominal outer diameter	110	0 / -15	620-2
B	width	28	0 / -120	620-2
Fw	inner enveloping circle diameter	72	20 / 0	5412-1
r1s min.	minimal chamfer dimension	1.5		5412-1
r2s min.	minimal chamfer dimension	1.5		5412-1
d1	inner shoulder diameter	~ 77.6		
D1	outer shoulder diameter	~ 96.1		
E	raceway diameter outer ring	100		
B1	flange width	4		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	130000	19500	281	155000	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		5300	6300

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	40	70

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Cylindrical rollers	100Cr6	683-17	58-65
Cage	PA66 + GF25		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.