Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

general data/description

created: 06.06.2014 / 05 page: 1 / 2

article 22210 E W33 **Art-No.** 43915


brand SKA **weight/kg** 0.638

remark Y-factors: Y1: Fa/Fr <= e / Y2: Fa/Fr > e / X-factors: X1: Fa/Fr <= e / X2: Fa/Fr > e.

description

22210	Size
E	Reinforced version
W33	Lubrication groove and -hole in outer ring

dimensions and tolerances

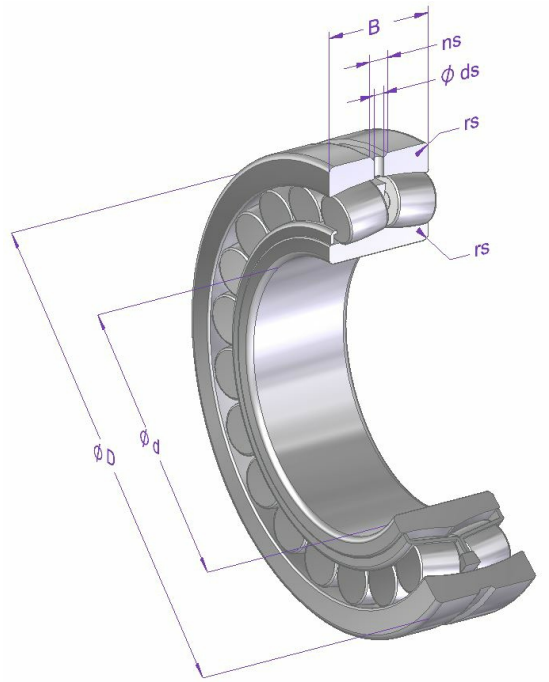

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	50	0 / -12	620-2
D	nominal outer diameter	90	0 / -15	620-2
B	width	23	0 / -120	620-2
rs min.	minimal chamfer dimension	1.1		635-2
ns	lubrication groove width	5.5		
ds	diameter lubrication hole	3x Ø3		
e	calculation factor	0.24		281
Y1	calculation factor	2.79		281
Y2	calculation factor	4.15		281
Y0	calculation factor	2.73		76
X1	calculation factor	1		281
X2	calculation factor	0.67		281
X0	calculation factor	1		76

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	89000	13000	281	108000	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		5600	7000

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	35	55

article 22210 E W33 **Art-No.** 43915

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Spherical rollers	100Cr6	683-17	58-66
Cage	Sheet steel		
Guide ring	PM Steel		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.