general data/description

created: 26.06.2018 / 02 page: 1 / 3

article 22212 E W33 **Art-No.** 44886

brand SKA **weight/kg** 1.16

remark Y-factors: Y1: Fa/Fr <= e / Y2: Fa/Fr > e / X-factors: X1: Fa/Fr <= e / X2: Fa/Fr > e.


description

22212	Size
E	Reinforced version
W33	Lubrication groove and -hole in outer ring

dimensions and tolerances

article 22212 E W33 **Art-No.** 44886

dimensions and tolerances

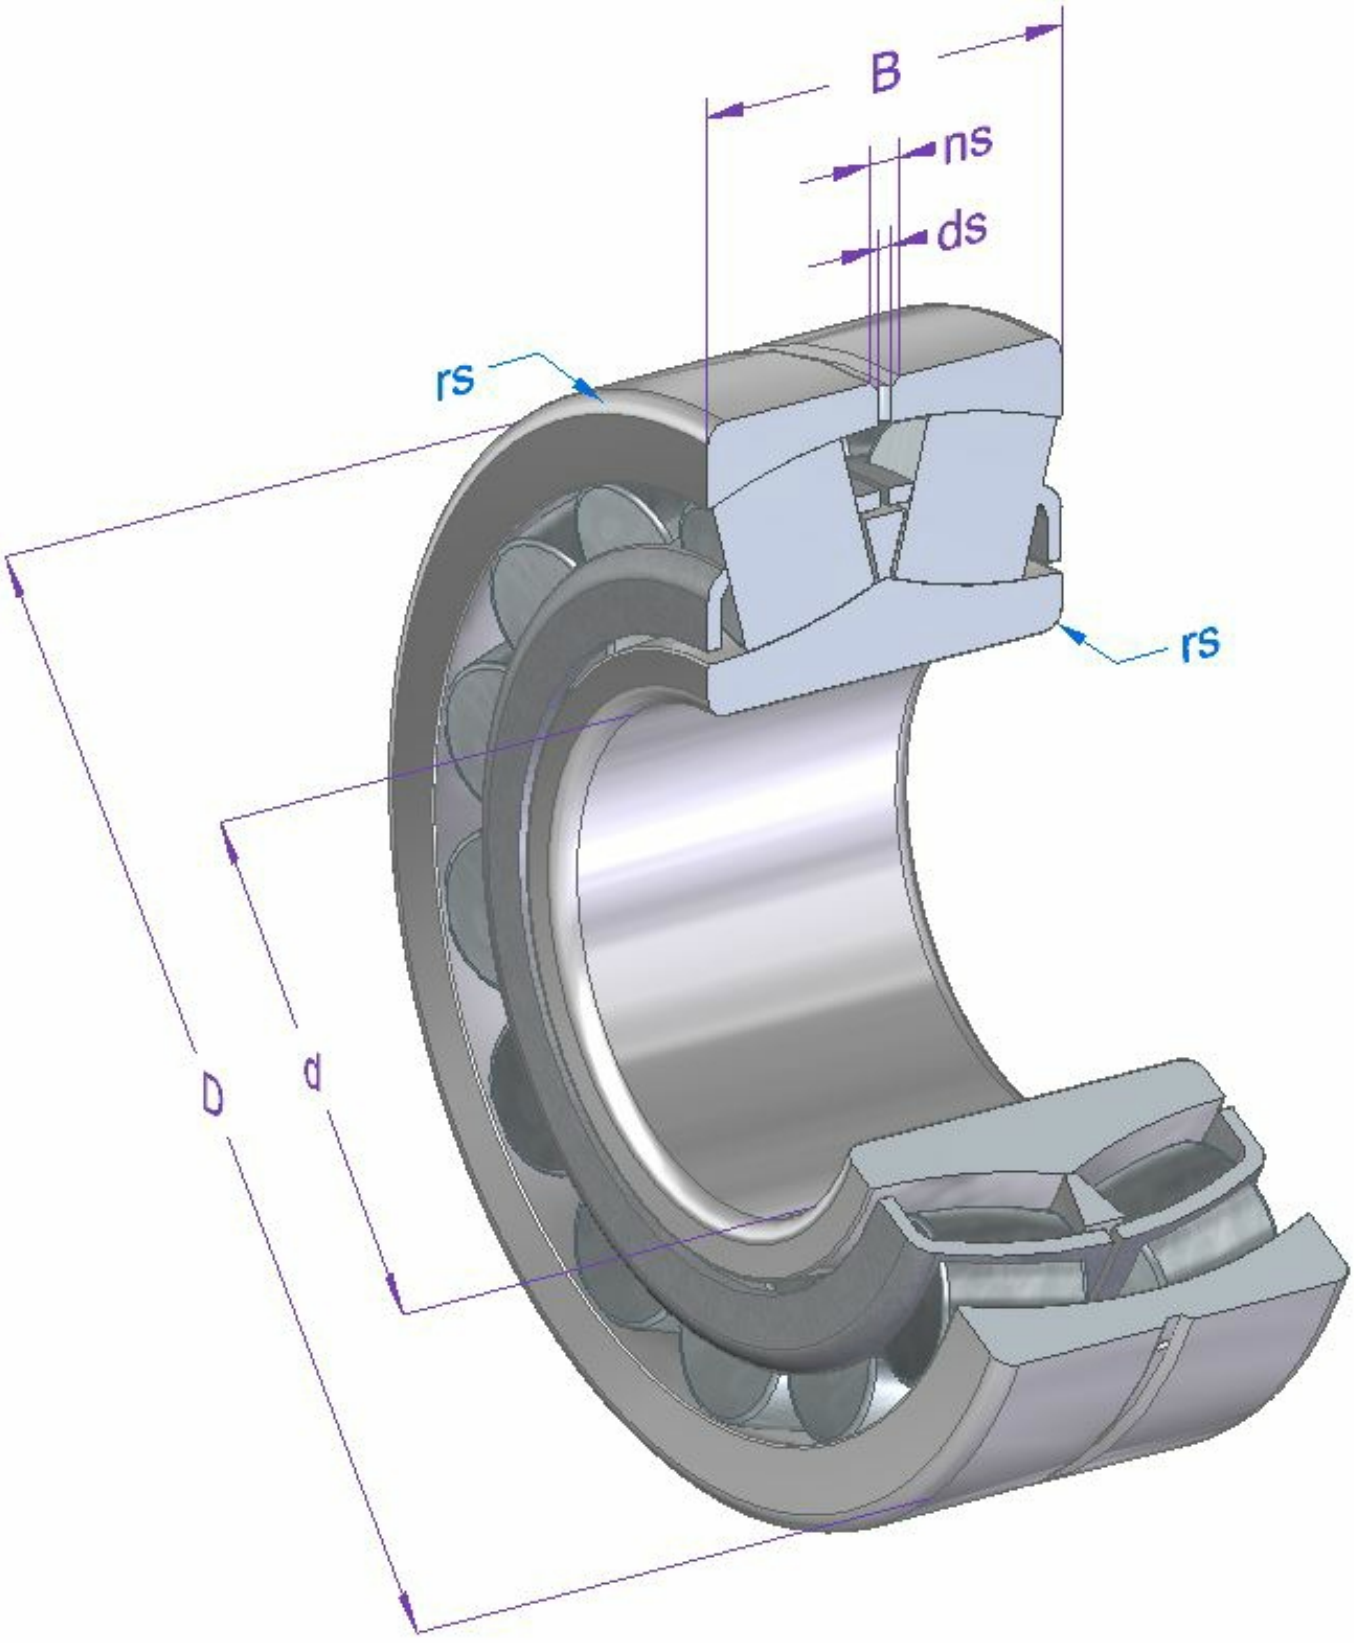

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	60	0 / -15	620-2
D	nominal outer diameter	110	0 / -15	620-2

article 22212 E W33 **Art-No.** 44886

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
B	width	28	0 / -150	620-2
rs min.	minimal chamfer dimension	1.5		635-2
ns	lubrication groove width	5.5		
ds	diameter lubrication hole	3x Ø3		
e	calculation factor	0.24		281
Y1	calculation factor	2.81		281
Y2	calculation factor	4.19		281
Y0	calculation factor	2.75		76
X1	calculation factor	1		281
X2	calculation factor	0.67		281
X0	calculation factor	1		76

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	139000	21000	281	173000	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		4800	6000

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	40	65

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Spherical rollers	100Cr6	683-17	58-66
Cage	Sheet steel		
Guide ring	PM Steel		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.