Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

created: 04.12.2014 / 03

article NKX 30 Z LX3 **Art-No.** 44925 **brand** SKA **weight/kg** 0.148

remark Axial part greased. Axial load ratings: C = 20400 N / C0 = 42000 N


description

NKX	Design
30	Size
Z	Shield on one side, not touching

greasing

LX3	SHELL GADUS S3 V220C 2

dimensions and tolerances

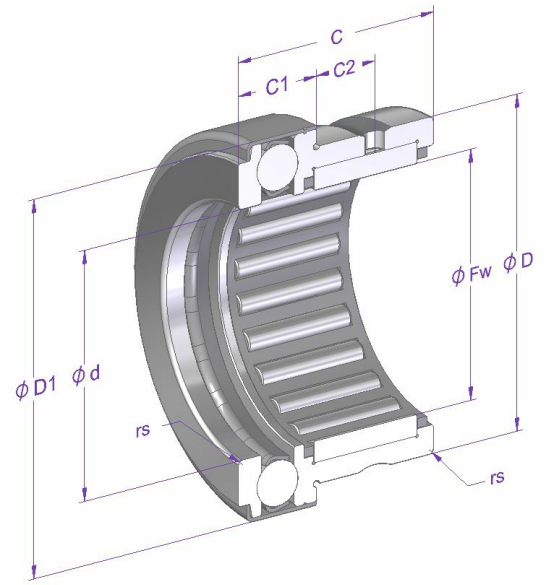

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
Fw	inner enveloping circle diameter	30	20 / 33	5429-1
d	nominal inner diameter	30	40 / 73	5429-1
D	nominal outer diameter	42	0 / -11	620-2
D1	outer diameter	48.2		5429-1
C	width	30	0 / -250	5429-1
C1	width	11	0 / -200	5429-1
C2	distance lubrication hole	9.5		5429-1
rs min.	minimal chamfer dimension	0.6		620-6

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	23900		281	37800	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		4300	

operating temperature	max. [°C]	min. [°C]
	120	-20

material specification

description	material	DIN/ISO	hardness
Outer ring	100Cr6	683-17	58-65
Needle rollers	100Cr6	683-17	58-65
Needle cage	Sheet steel		
Balls	100Cr6	683-17	58-65
Ball Cage	Sheet steel		
Axial washer	100Cr6	683-17	58-65
Shield	Sheet steel		

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article NKX 30 Z LX3 **Art-No.** 44925

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.