Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description


created: 19.12.2019 / 01 page: 1 / 1

article GLY.PXG 203601.5 F **Art-No.** 45102 **brand** SKA **weight/kg** 0.00744

description

GLY.PXG	Design
203601.5	Size
F	Sliding layer, maintenance-free

dimensions and tolerances

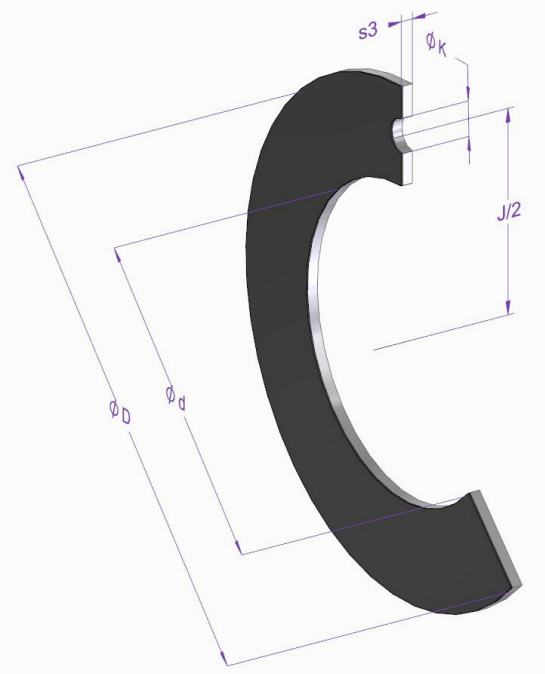

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	20	0 / 250	6525
D	nominal outer diameter	36	-250 / 0	6525
J	pitch diameter	28	-150 / 150	6525
K	hole diameter	3	100 / 400	6525
s3	wall thickness	1.5	-60 / -10	WERKSNORM
v max. [m/s]	Sliding speed	2		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	56000			176000	

operating temperature	max. [°C]	min. [°C]
	250	-195

material specification

description	material	DIN/ISO	hardness
Slide coating	PTFE		
Supporting material	Bronze - Powder		
Washer	Sheet steel		
Outside coating	Copper - Tin		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.