Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

general data/description

created: 11.02.2021 / 01 page: 1 / 2

article NATR 5 PP LX3 **Art-No.** 45228 **brand** SKA **weight/kg** 0.014

remark Load ratings calculated according norms for rolling bearings. Rotational speed for F < 0.05 C0rw.


description

NATR	Design
5	Size
PP	Seals on both sides

greasing

LX3	SHELL GADUS S3 V220C 2


dimensions and tolerances

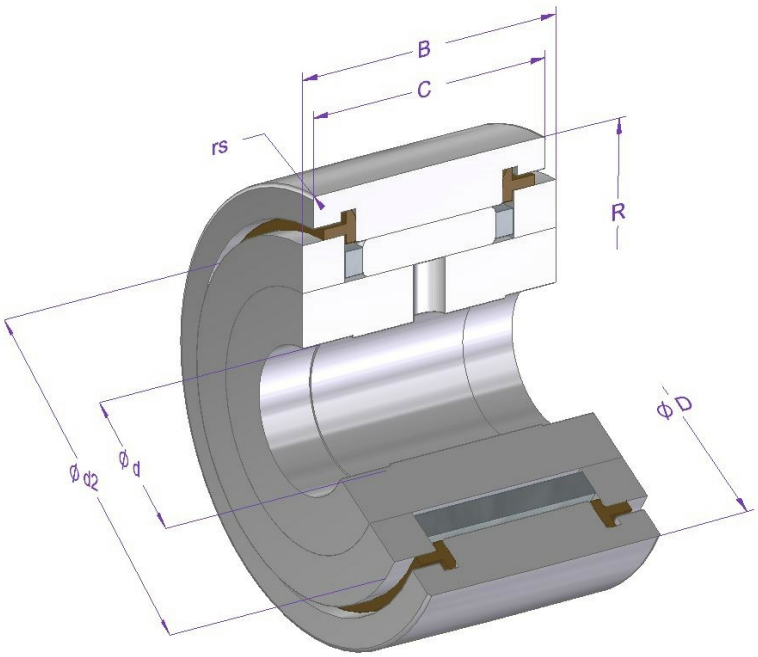

Einbau (Prinzipdarstellung)

Installation (représentation schématique)

Installation (schematic diagram)

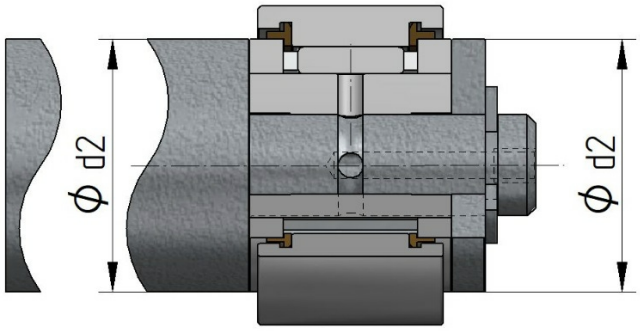

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	5	0 / -8	620-2
D	nominal outer diameter	16	0 / -50	WERKSNORM
d2	axial washer outer diameter	12.5		
B	inner ring width	12	0 / -180	WERKSNORM
C	outer ring width	11	0 / -120	620-2
rs min.	minimal chamfer dimension	0.15		ISO 7063
R	radius outer ring	OP		
Crw [N]	Effective dynamic load rating	3250		
C0rw [N]	Effective static load rating	2980		
Curw [N]	Effective fatigue limit load	340		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	3570	435	281	3410	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		14000	

operating temperature	max. [°C]	min. [°C]
	100	-20

bearing clearance	radial min. [µm]	max. [µm]
	10	35

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article NATR 5 PP LX3 **Art-No.** 45228

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Needle rollers	100Cr6	683-17	58-65
Seals	PA66		
Axial washers	100Cr6		
Cage	Sheet steel	683-17	58-65

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.