general data/description

created: 07.10.2014 / 04 page: 1 / 2

article 22216 K E W33 **Art-No.** 45497


brand SKA **weight/kg** 2.02

remark Y-Faktoren: Y1: Fa/Fr <= e / Y2: Fa/Fr > e / X-Faktoren: X1: Fa/Fr <= e / X2: Fa/Fr > e

description

22216	Size
K	Conical bore, 1:12
E	Reinforced version
W33	Lubrication groove and -hole in outer ring

dimensions and tolerances

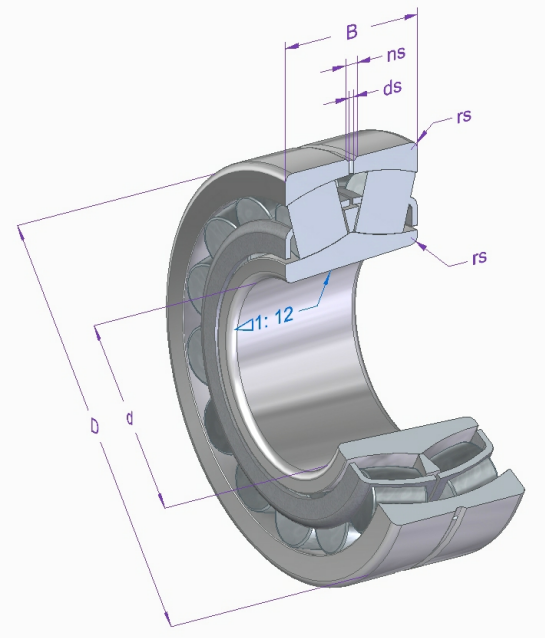

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	80	0 / 30	620-2
D	nominal outer diameter	140	0 / -18	620-2
B	width	33	0 / -150	620-2
rs min.	minimal chamfer dimension	2		635-2
ns	lubrication groove width	5.5		
ds	diameter lubrication hole	3x Ø3		
e	calculation factor	0.22		281
Y1	calculation factor	3.1		281
Y2	calculation factor	4.62		281
Y0	calculation factor	3.03		76
X0	calculation factor	1		76
X1	calculation factor	1		281
X2	calculation factor	0.67		281

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	204000	34300	281	265000	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		3200	4000

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	70	95

article 22216 K E W33 **Art-No.** 45497

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Spherical rollers	100Cr6	683-17	58-66
Cage	Sheet steel		
Guide ring	PM Steel		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.