Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

created: 26.01.2015 / 02

article NKXR 35 Z LX3 **Art-No.** 45626 **brand** SKA **weight/kg** 0.165

remark Axial part greased.


description

NKXR	Design
35	Size
Z	Shield on one side, not touching

greasing

LX3	SHELL GADUS S3 V220C 2

dimensions and tolerances

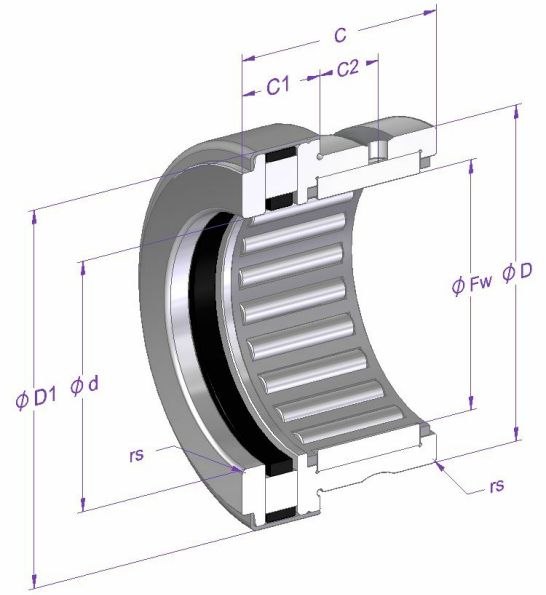

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	35	50 / 89	5429-1
Fw	inner enveloping circle diameter	35	25 / 41	5429-1
D	nominal outer diameter	47	0 / -11	620-2
D1	outer diameter	53.2		5429-1
C	width	30	0 / -250	5429-1
C1	width	12	0 / -200	5429-1
C2	distance lubrication hole	9		5429-1
rs min.	minimal chamfer dimension	0.6		5429-1

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	25000		281	42000	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		1400	3000

operating temperature	max. [°C]	min. [°C]
	120	-20

material specification

description	material	DIN/ISO	hardness
Outer ring	100Cr6	683-17	58-65
Needle rollers	100Cr6	683-17	58-65
Needle cage	Sheet steel		
Balls	100Cr6	683-17	58-65
Ball Cage	PA66		
Axial washer	100Cr6	683-17	58-65
Protection cap	Sheet steel		

article NKXR 35 Z LX3 **Art-No.** 45626

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.