general data/description

created: 05.02.2015 / 04 page: 1 / 2

article 3814 B TN ZZ NS7 **Art-No.** 45838 **brand** SKA **weight/kg** 0.19

remark Y-factors: Y1: Fa/Fr <= e / Y2: Fa/Fr > e.


description

3814	Size
B	Pressure angle
TN	Plastic cage
ZZ	Shields on both sides, not touching

greasing

NS7	KYODO YUSHI MULTEMP SRL

dimensions and tolerances

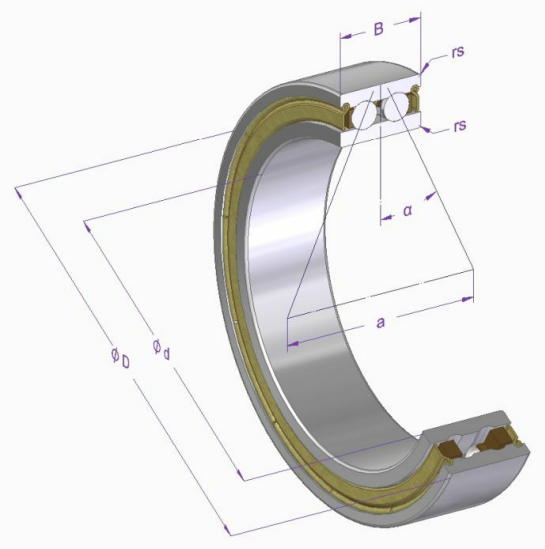

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	70	0 / -15	620-2
D	nominal outer diameter	90	0 / -15	620-2
B	width	15	0 / -150	620-2
rs min.	minimal chamfer dimension	0.6		616
a	load application point	~51.3		
alpha	contact angle	30°		628-3
e	calculation factor	0.8		281
Y1	calculation factor	0.78		281
Y2	calculation factor	1.24		281
Y0	calculation factor	0.66		76
X	calculation factor	0.63		281

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	13800	1010	281	19400	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		4400	

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	axial min. [µm]	max. [µm]
	15	40

article 3814 B TN ZZ NS7 **Art-No.** 45838

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-66
Cage	PA66+GF25		
Shields	Sheet steel		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.