Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

general data/description

created: 11.03.2015 / 02 page: 1 / 2

article GLCTE 40 HA2 **Art-No.** 46011 **brand** SKA **weight/kg** 1.27

description


GLCTE Design
40 Size

remark Rotational speed is reference value for shaft tolerance h7. Also depending on load and seal.

greasing

HA2 HANGU2#, GREAT WALL MOTOR BEARING GREASE

dimensions and tolerances

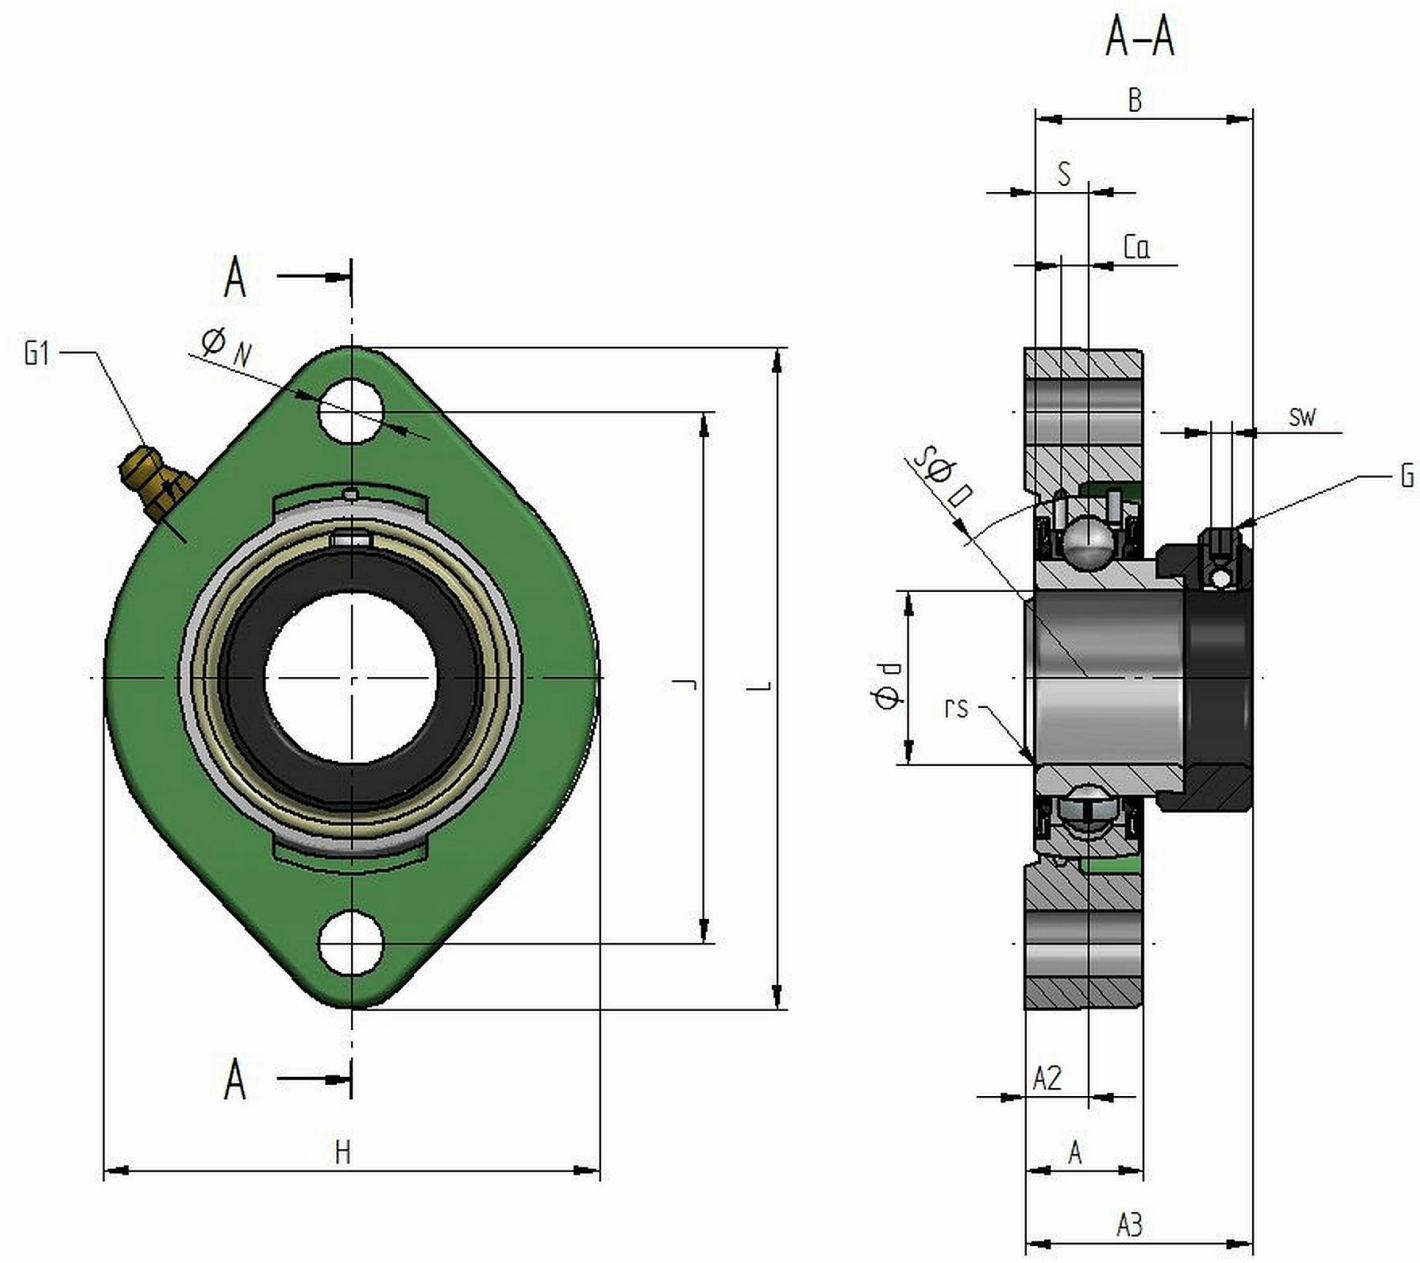

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	40	0 / 21	626-1
D	nominal outer diameter	80	0 / -13	620-2
B	width	43.7		626-1
rs min.	minimal chamfer dimension	1.1		625-1
Ca	distance lubrication groove	6.3		626-1
S	swing axle distance	11		626-1
A	housing height	25		
A2	effect distance	13.5	-500 / 500	
A3	total width	46.2		
J	hole spacing	119	-700 / 700	

article GLCTE 40 HA2 **Art-No.** 46011

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
L	housing length	150		
H	housing width	100		
N	hole diameter	14		
G	thread	M10 x 1.25		
sw	wrench size	5		
G1	thread grease nipple	Rp 1/8"		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	29500	940	281	18000	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		3000	

bearing clearance	radial min. [µm]	max. [µm]
	15	33

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-65
Cage	Sheet steel		
Seals	Sheet steel/NBR		
Clamping ring	C45		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.