general data/description

created: 04.06.2015 / 04 page: 1 / 2

article 23030 E M W33 **Art-No.** 46231


brand SKA **weight/kg** 7.75

remark Y-factors: Y1: Fa/Fr <= e / Y2: Fa/Fr > e / X-factors: X1: Fa/Fr <= e / X2: Fa/Fr > e.

description

23030	Size
E	Reinforced version
M	Brass cage, roller centered
W33	Lubrication groove and -hole in outer ring

dimensions and tolerances

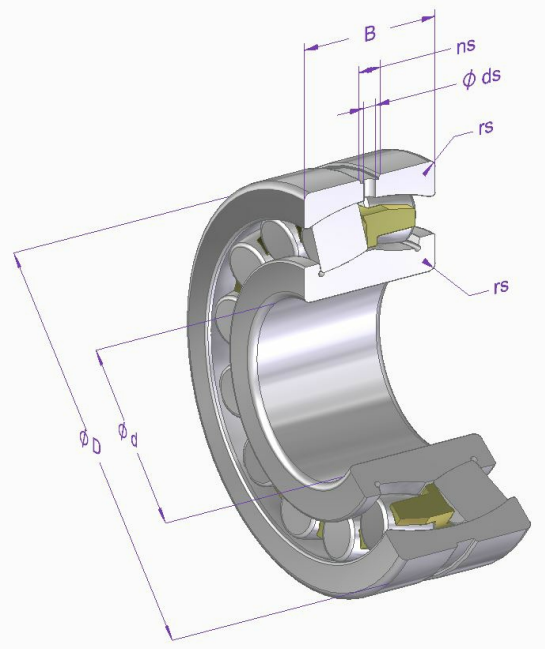

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	150	0 / -25	620-2
D	nominal outer diameter	225	0 / -30	620-2
B	width	56	0 / -250	620-2
rs min.	minimal chamfer dimension	2.1		635-2
ns	lubrication groove width	8		
ds	diameter lubrication hole	6x Ø5		
e	calculation factor	0.22		281
Y1	calculation factor	3.01		281
Y2	calculation factor	4.48		281
Y0	calculation factor	2.94		76
X1	calculation factor	1		281
X2	calculation factor	0.67		281
X0	calculation factor	1		76

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	474000	72500	281	808000	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		1400	1800

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	110	170

article 23030 E M W33 **Art-No.** 46231

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Spherical rollers	100Cr6	683-17	58-66
Cage	CuZn40Pb2		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.