general data/description

created: 02.12.2015 / 06 page: 1 / 2

article 3308 B TN 2RS NS7 **Art-No.** 46534 **brand** SKA **weight/kg** 1.05

remark Y-factors: Y1: Fa/Fr <= e / Y2: Fa/Fr > e.


description

3308	Size
B	Pressure angle
TN	Plastic cage
2RS	Sealing washers on both sides, touching

greasing

NS7	KYODO YUSHI MULTEMP SRL

dimensions and tolerances

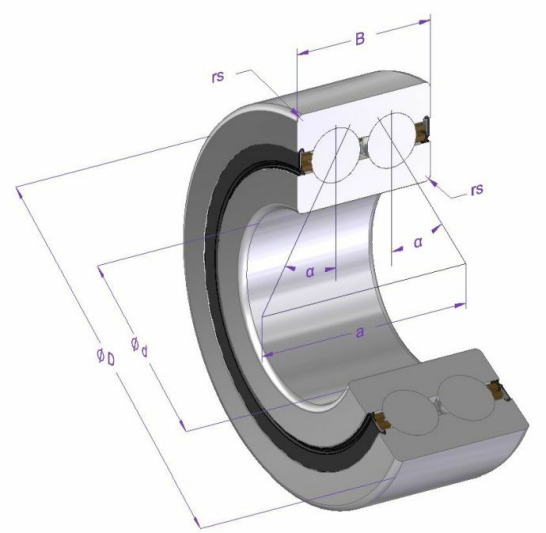

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	40	0 / -12	620-2
D	nominal outer diameter	90	0 / -15	620-2
B	width	36.5	0 / -120	620-2
rs min.	minimal chamfer dimension	1.5		628-3
a	load application point	~53.3		
alpha	contact angle	30°		628-3
e	calculation factor	0.8		281
Y1	calculation factor	0.78		281
Y2	calculation factor	1.24		281
Y0	calculation factor	0.66		76
X	calculation factor	0.63		281

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	60500	2250	281	43900	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		4700	

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	axial min. [µm]	max. [µm]
	9	29

article 3308 B TN 2RS NS7 **Art-No.** 46534

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-66
Cage	PA66+GF25		
Sealing washers	St12/NBR		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.