general data/description


created: 20.04.2016 / 04 page: 1 / 2

article NUP 2208 E TVP2 HQS C3 **Art-No.** 46848 **brand** SKA **weight/kg** 0.47

description

NUP	Design
2208	Size
E	Reinforced version
TVP2	Plastic cage
HQS	Material
C3	Internal clearance

dimensions and tolerances

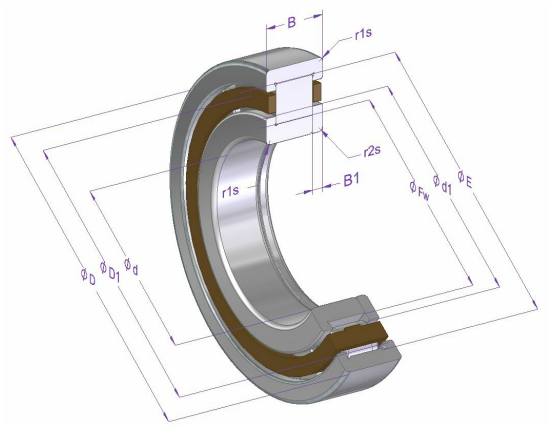

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	40	0 / -12	620-2
D	nominal outer diameter	80	0 / -13	620-2
B	width	23	0 / -120	620-2
Fw	inner enveloping circle diameter	49.5	0 / 15	5412-1
r1s min.	minimal chamfer dimension	1.1		5412-1
r2s min.	minimal chamfer dimension	1.1		5412-1
D1	outer shoulder diameter	67.5		
d1	inner shoulder diameter	54.2		5412-1
C3	internal clearance	0.045 / 0.070		620-4
B1	flange width	4		
E	raceway diameter outer ring	71.5		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	71100	9500	281	76300	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		7500	9000

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	45	70

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Cylindrical rollers	100Cr6	683-17	58-65
Cage	PA66 + GF25		
Flange disc	100Cr6	683-17	58-65

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article NUP 2208 E TVP2 HQS C3 **Art-No.** 46848

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.