Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description


created: 21.11.2016 / 03 page: 1 / 1

article NU 2220 E TVP2 HQS **Art-No.** 47392 **brand** SKA **weight/kg** 4.70

description

NU	Design
2220	Size
E	Reinforced version
TVP2	Plastic cage
HQS	Material

dimensions and tolerances

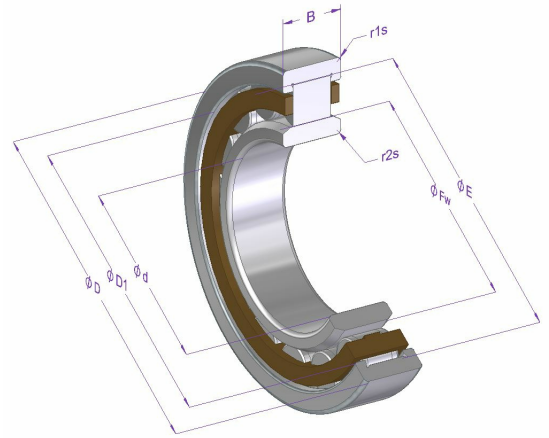

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	100	0 / -20	620-2
D	nominal outer diameter	180	0 / -25	620-2
B	width	46	0 / -200	620-2
r1s min.	minimal chamfer dimension	2.1		5412-1
r2s min.	minimal chamfer dimension	2.1		5412-1
Fw	inner enveloping circle diameter	119	0 / 20	5412-1
E	raceway diameter outer ring	163		
D1	outer shoulder diameter	157.2		
s	axial displacement	~ 2		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	335000	51200	281	449000	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		3200	3800

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	50	85

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Cylindrical rollers	100Cr6	683-17	58-65
Cage	PA66 + GF25		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.