
general data/description

created: 16.03.2017 / 04 page: 1 / 2

article B 7208 C T U L P4S **Art-No.** 47686 **brand** SKA **weight/kg** 0.357

description	
B	Design
7208	Size
C	Pressure angle
T	Hard tissue cage
U	Universally pairable
L	Slight preload
P4S	Tolerance class

dimensions and tolerances

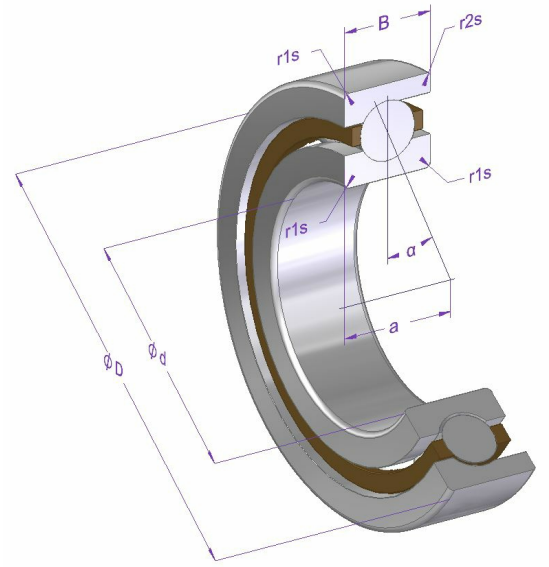

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	40	0 / -6	620-2
D	nominal outer diameter	80	0 / -7	620-2
B	width	18	0 / -120	620-2
r1s min.	minimal chamfer dimension	1.1		628-1
r2s min.	minimal chamfer dimension	0.6		628-1
a	load application point	~17		
alpha	contact angle	15°		628-1
Fv	pretension [N]	180		
c	axial stiffness [N/µm]	50		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	36300	1300	281	25200	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		18000	30000

operating temperature	max. [°C]	min. [°C]
	120	-20

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-65
Cage	PF		

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article B 7208 C T U L P4S **Art-No.** 47686

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.