general data/description

created: 09.02.2021 / 02 page: 1 / 2

article HC 71906 E T 2RSD U L P4S BS2 **Art-No.** 47939

brand SKA **weight/kg** 0.048

remark Tolerance class P4S: dimensional accuracy P4, running accuracy P2, according DIN 620-2. C0 for hybrid according DIN ISO 76 Bbl 2 - is lower than standard. Rate of rotation = 1.25 x standard.


description

HC	Design
71906	Size
E	Pressure angle
T	Hard tissue cage
2RSD	Sealing washers on both sides, not touching
U	Universally pairable
L	Slight preload
P4S	Tolerance class

greasing

BS2	KLÜBER SPEED BF 72-22

dimensions and tolerances

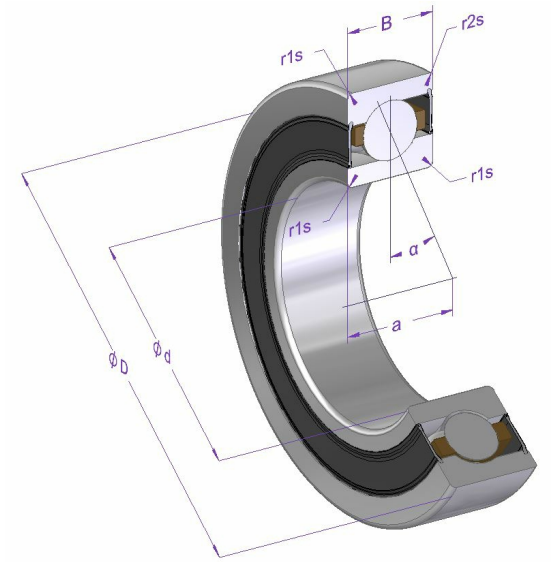

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	30	0 / -5	620-2
D	nominal outer diameter	47	0 / -6	620-2
B	width	9	0 / -120	620-2
r1s min.	minimal chamfer dimension	0.3		628-6
r2s min.	minimal chamfer dimension	0.3		SONDER
a	load application point	~13.5		
alpha	contact angle	25°		628-6
Fv	pretension [N]	24		
c	axial stiffness [N/µm]	52.5		
KaE	Lift-off force [N]	69		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	6000	180	281	3480	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		45000	

operating temperature	max. [°C]	min. [°C]
	120	-20

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article HC 71906 E T 2RSD U L P4S BS2 **Art-No.** 47939

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	Si3N4		
Cage	PF		
Sealing washers	St12/NBR		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.