Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

article KRE 52 PP OP SK LX3 **Art-No.** 48278 **brand** SKA **weight/kg** 0.473

remark Tragzahlen gerechnet nach Normen für Wälzlager. Drehzahlen für F < 0.05 C0.


description

KRE	Design
52	Size
PP	Seals on both sides
OP	Optimized profile
SK	Hexagon socket

greasing

LX3	SHELL GADUS S3 V220C 2

dimensions and tolerances

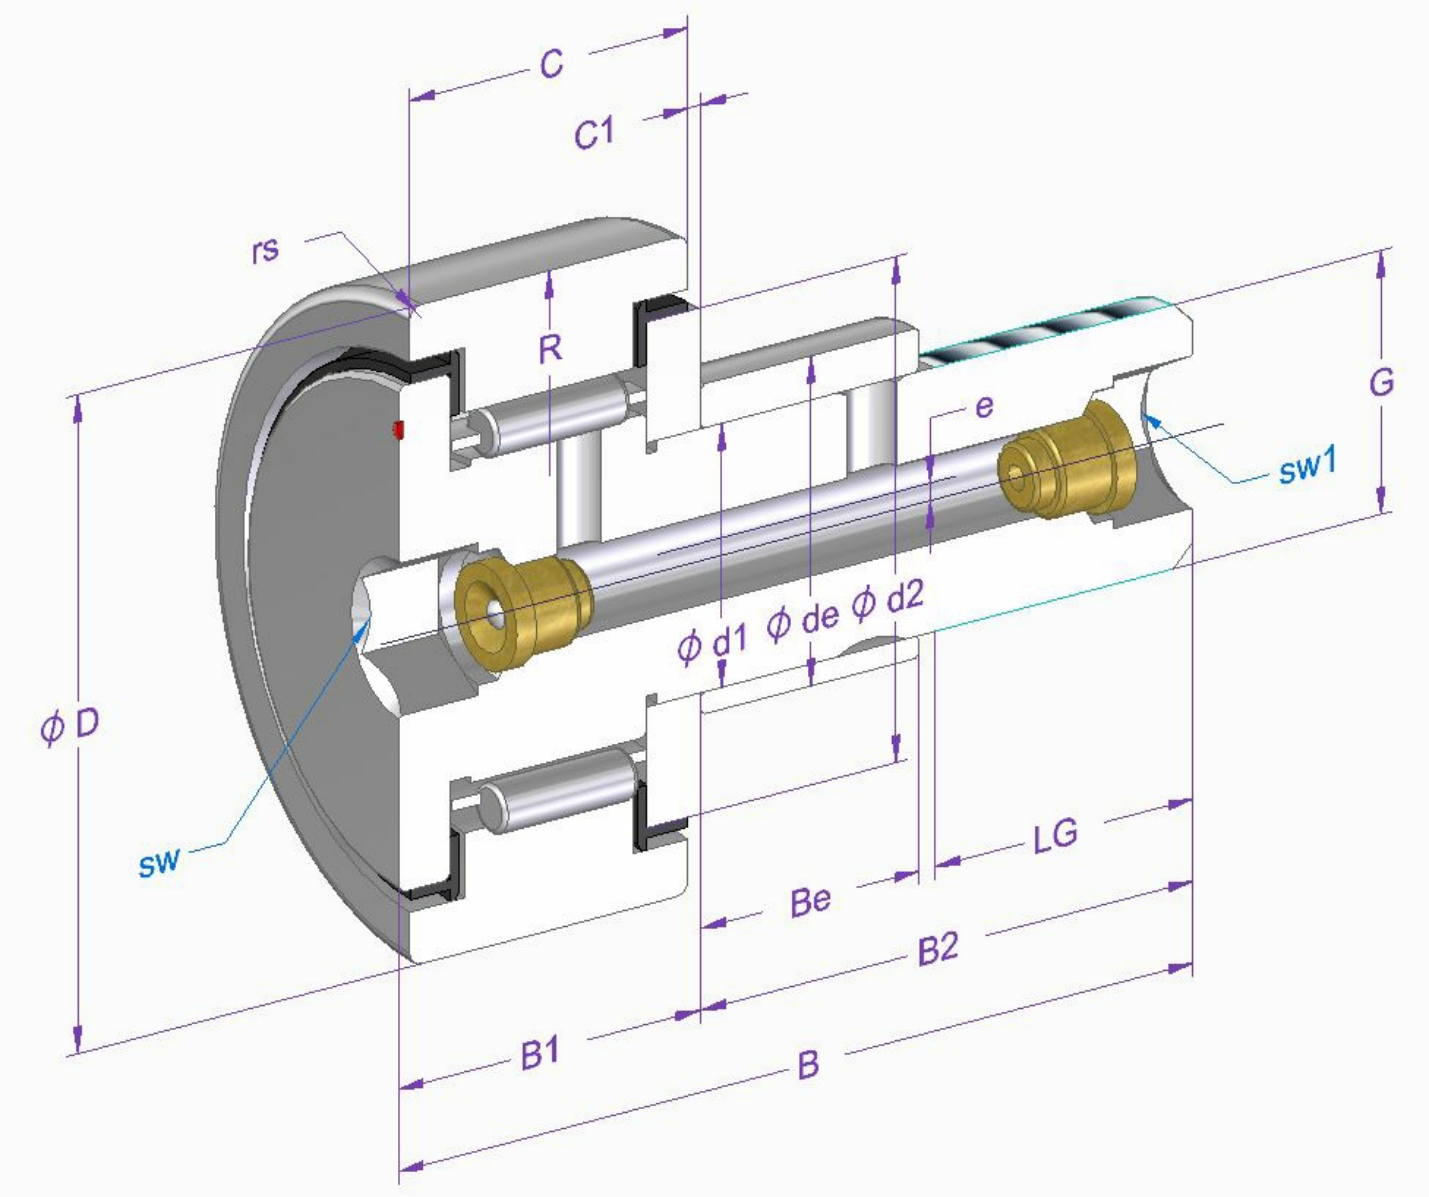

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d1	shaft diameter	20	0 / -21	
d2	inner shoulder diameter	36.5		
de	eccentric diameter	24	0 / -52	
e	eccentricity	1		
D	nominal outer diameter	52	0 / -50	
C	outer ring width	24	0 / -120	620-2
C1	distance	0.8		
B	length	66	-300 / 600	

article KRE 52 PP OP SK LX3 **Art-No.** 48278

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
B1 max.	width	25.6		
B2	shaft lenght	40.5		
Be	eccentric length	18		
rs min.	minimal chamfer dimension	1		
sw	wrench size	10		
LG	thread length	21		
G	thread	M20 x 1.5		
R	radius	OP		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	19000	4200	281	31000	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		2400	

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	0	25

material specification

description	material	DIN/ISO	hardness
Outer ring	100Cr6	683-17	58-65
Roller stud	16CrMo4		
Needle rollers	100Cr6	683-17	58-65
Thrust washer	100Cr6	683-17	683-17
Seals	PA66		
Cage	Sheet steel		
Eccentric ring	100Cr6	683-17	683-17

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.