Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

created: 11.10.2017 / 02

article 6203 ZZ SN24 BK1 **Art-No.** 48673

brand SKA **weight/kg** 0.06

remark C0 für Hybrid nach DIN ISO 76 Bbl 2 - ist niedriger als Standard. Drehzahl = 1.25 x Standard.


description

6203	Size
ZZ	Shields on both sides, not touching
SN24	Ceramic rolling

greasing

BK1	KLÜBERLECTRIC BE44-152

dimensions and tolerances

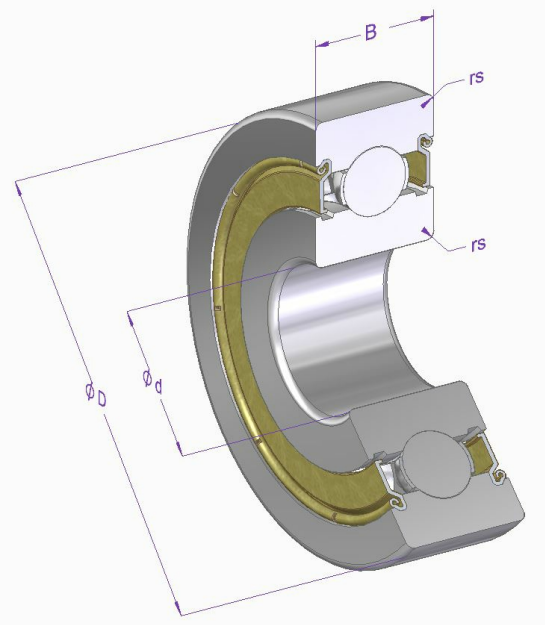

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	17	0 / -8	620-2
D	nominal outer diameter	40	0 / -11	620-2
B	width	12	0 / -120	620-2
rs min.	minimal chamfer dimension	0.6		625-1

calculation and operating data

load ratings	**dynamic C [N]**	**fatique load limit load Cu [N]**		**DIN/ISO**	**static Co [N]**	**DIN/ISO**
	9570	175		281	3360	76
speed of rotation limit	**reference n [1/min]**	**grease n [1/min]**	**oil n [1/min]**			
		22000				
operating temperature	**max. [°C]**	**min. [°C]**				
	120	-20				
bearing clearance	**radial min. [µm]**	**max. [µm]**				
	3	18				

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	Si3N4		
Cage	St12		
Shields	Sheet steel		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.