general data/description

created: 08.05.2018 / 02 page: 1 / 2

article LR 605 NPP U NS7 **Art-No.** 49392

brand SKA **weight/kg** 0.01

remark Tragzahlen gerechnet nach Normen für Wälzlager. Drehzahlen für F < 0.05 C0.


description

LR	Design
605	Size
NPP	Sealing washers on both sides, touching
U	Crowned outer ring lateral surface

greasing

NS7	KYODO YUSHI MULTEMP SRL

dimensions and tolerances

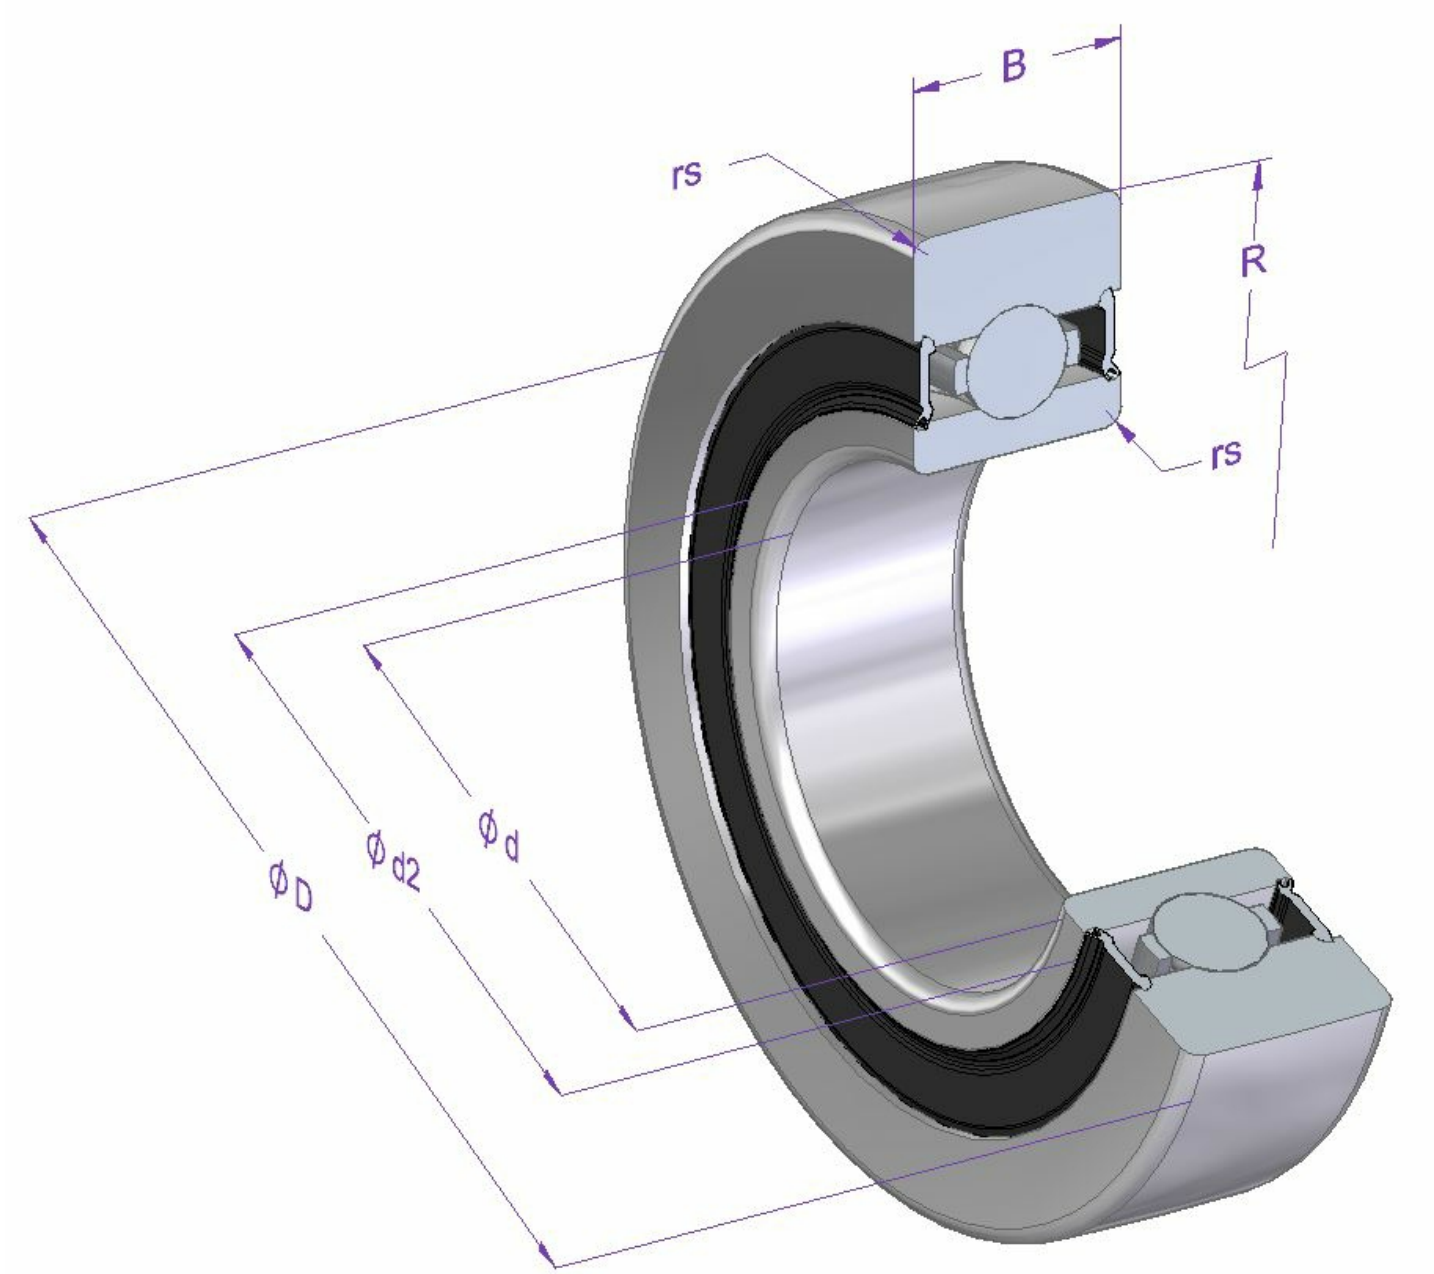

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	5	0 / -8	620-2
d2	inner shoulder diameter	8		
D	nominal outer diameter	16	0 / -50	
B	width	5	0 / -120	620-2
rs min.	minimal chamfer dimension	0.2		
R	radius outer ring	500		

article LR 605 NPP U NS7 **Art-No.** 49392

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
Crw [N]	Effective dynamic load rating	1009		
C0rw [N]	Effective static load rating	448		
Curw [N]	Effective fatigue limit load	21		

calculation and operating data

load ratings	**dynamic C [N]**	**fatique load limit load Cu [N]**		**DIN/ISO**	**static Co [N]**	**DIN/ISO**
	1080	22		281	439	76
speed of rotation limit	**reference n [1/min]**	**grease n [1/min]**	**oil n [1/min]**			
		23000				
operating temperature	**max. [°C]**	**min. [°C]**				
	120	-20				
bearing clearance	**radial min. [µm]**	**max. [µm]**				
	2	13				

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-65
Cage	St12		
Sealing washers	Sheet steel/NBR		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.