Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

article KR 32 PP OP SK BH2 **Art-No.** 49485 **brand** SKA **weight/kg** 0.10

remark Tragzahlen gerechnet nach Normen für Wälzlager. Drehzahlen für F < 0.05 C0.


description

KR	Design
32	Size
PP	Seals on both sides
OP	Optimized profile
SK	Hexagon socket

greasing

BH2	KLÜBERSYNTH UH1 14-151

dimensions and tolerances

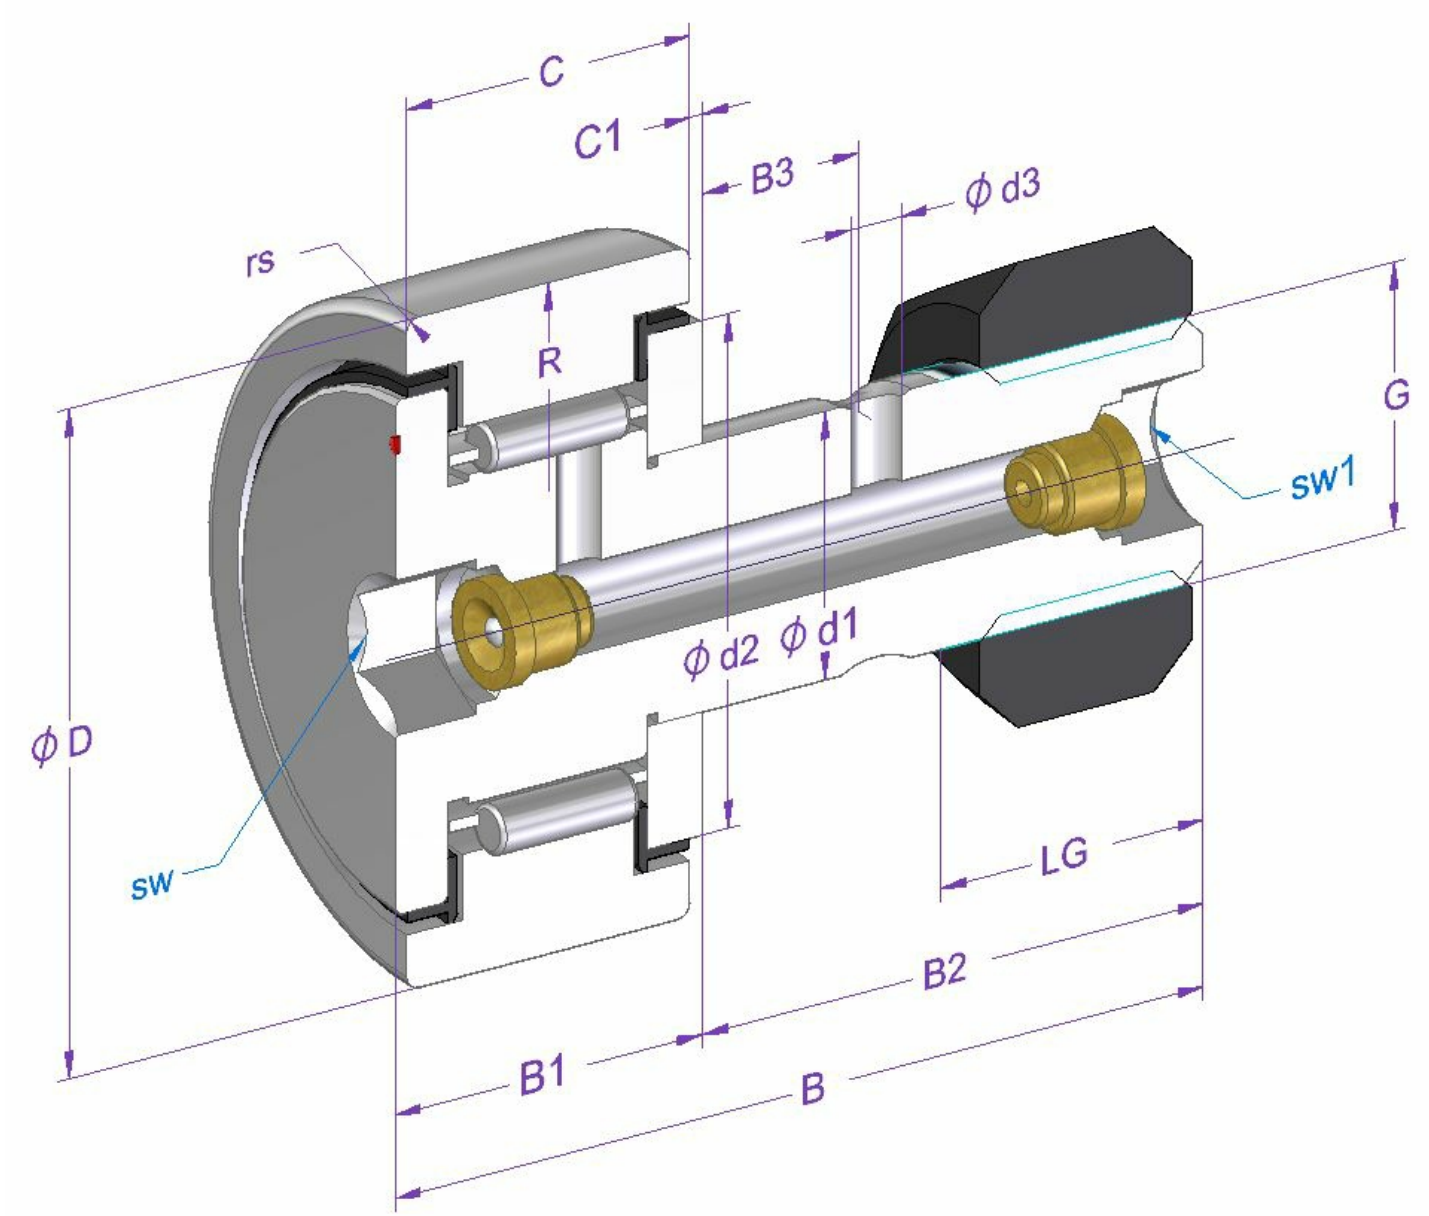

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d1	shaft diameter	12	0 / -18	
d2	inner shoulder diameter	23		
d3	diameter lubrication hole	3		
D	nominal outer diameter	32	0 / -50	
C	outer ring width	14	0 / -120	620-2
C1	distance	0.6		
B	length	40	-300 / 600	

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article KR 32 PP OP SK BH2 **Art-No.** 49485

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
B1 max.	width	15.2		
B2	shaft lenght	25		
B3	distance lubrication hole	6		
G	thread	M12x1.5		
LG	thread length	13		
sw	wrench size	6		
rs min.	minimal chamfer dimension	0.6		
R	radius	OP		

calculation and operating data

load ratings	**dynamic C [N]**	**fatique load limit load Cu [N]**	**DIN/ISO**	**static Co [N]**	**DIN/ISO**
	7800		281	9100	76

speed of rotation limit	**reference n [1/min]**	**grease n [1/min]**	**oil n [1/min]**
		5500	

operating temperature	**max. [°C]**	**min. [°C]**
	120	-20

bearing clearance	**radial min. [µm]**	**max. [µm]**
	0	25

material specification

description	material	DIN/ISO	hardness
Outer ring	100Cr6	683-17	58-65
Roller stud	16CrMo4		
Needle rollers	100Cr6	683-17	58-65
Thrust washer	100Cr6	683-17	58-65
Seals	PA66		
Cage	Sheet steel		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.