Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

created: 24.01.2024 / 01

article HFL 3530 BC1 **Art-No.** 49839 **brand** SKA **weight/kg** 0.058

remark For cup roller clutches the enveloping circle diameter Fw can only be checked in installed condition.


description

HFL	Design
3530	Size

greasing

BC1	KLÜBER CENTOPLEX 2DL

dimensions and tolerances

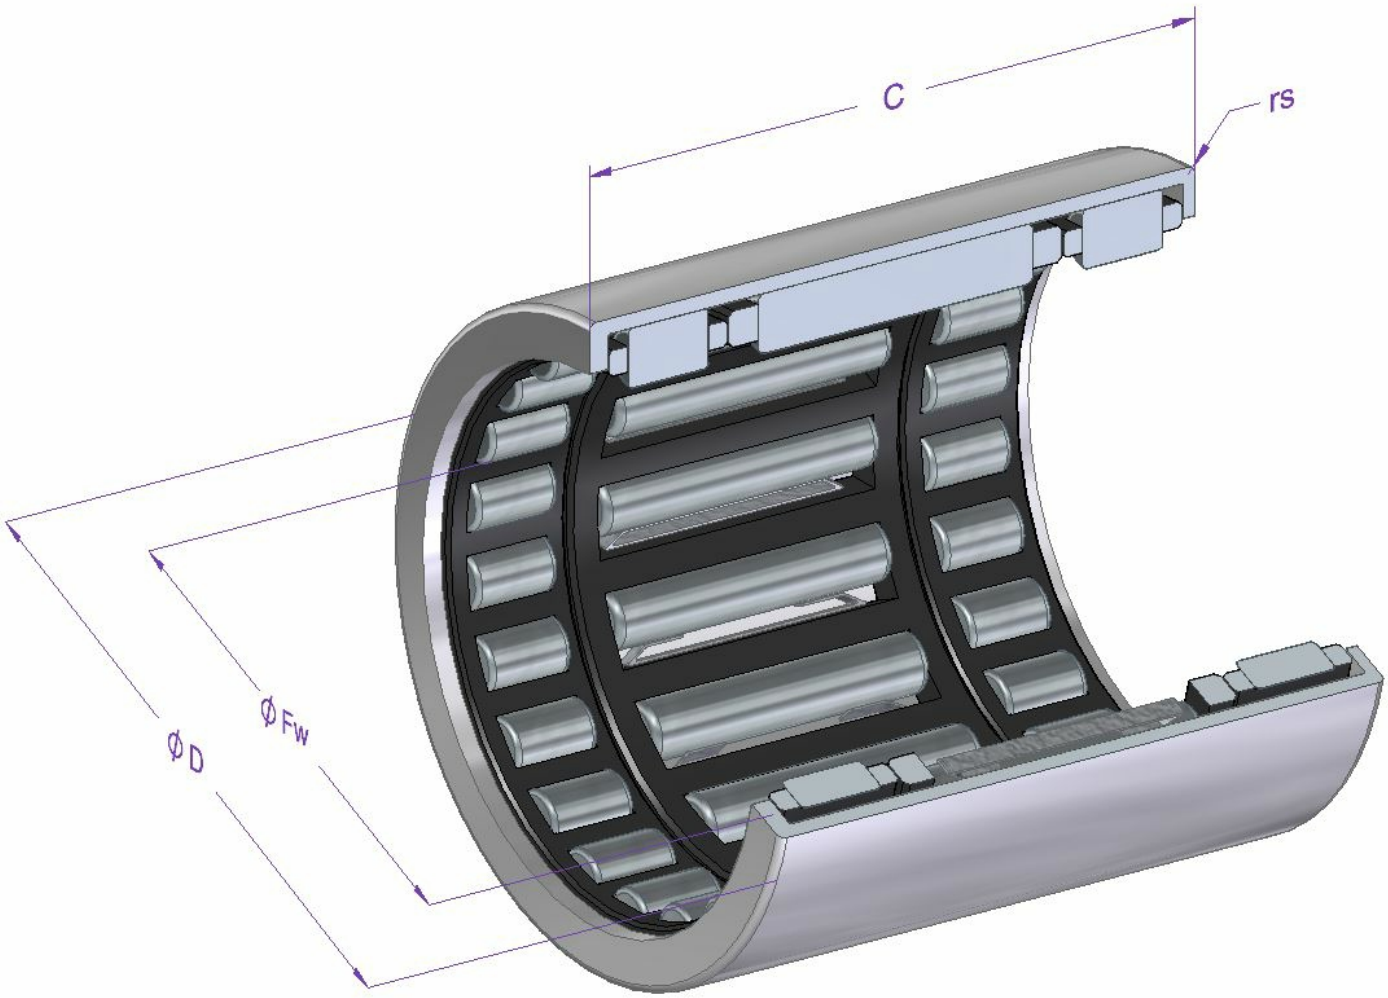

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
Fw	inner enveloping circle diameter	35	25 / 50	WERKSNORM
D	nominal outer diameter	42		
C	width	30	0 / -300	WERKSNORM
rs min.	minimal chamfer dimension	0.3		WERKSNORM
nGA [1/min]	Limiting speed with rotating outer ring	3900		
nGW [1/min]	Limiting speed with rotating shaft	3900		
Mdper. [Nm]	permissible torque	121		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	11100	2080		17300	

operating temperature	max. [°C]	min. [°C]
	80	-40

article HFL 3530 BC1 **Art-No.** 49839

material specification

description	material	DIN/ISO	hardness
Sleeve	Sheet steel		
Sprag	100Cr6	683-17	58-65
Needle rollers	100Cr6	683-17	58-65
Cage	PA66		
Springs	Sheet steel INOX		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.