general data/description

created: 24.07.2019 / 04 page: 1 / 2

article 3202 B TN 2RSA BI3 **Art-No.** 50023 **brand** SKA **weight/kg** 0.063

remark Y-factors: Y1: Fa/Fr <= e / Y2: Fa/Fr > e.


description


3202	Size
B	Pressure angle
TN	Plastic cage
2RSA	Sealing washers on both sides, touching

greasing

BI3	KLÜBER ISOFLEX LDS18 SPEZIAL A

dimensions and tolerances

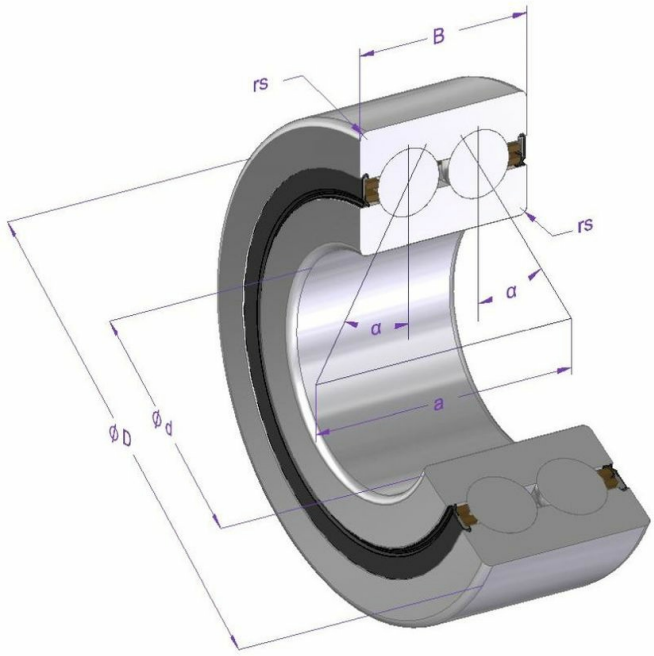

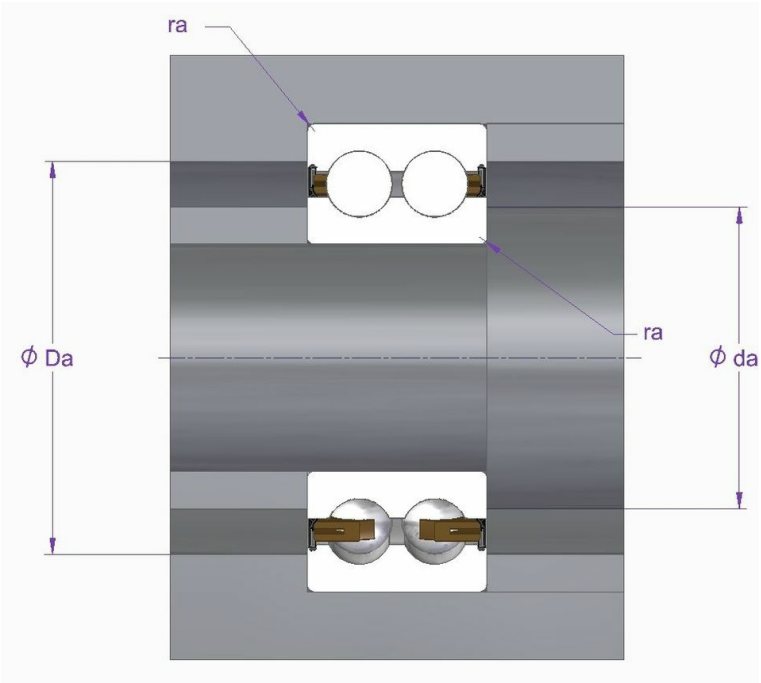

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	15	0 / -8	620-2
D	nominal outer diameter	35	0 / -11	620-2
B	width	15.9	0 / -120	620-2
rs min.	minimal chamfer dimension	0.6		628-3
alpha	contact angle	25°		
a	load application point	~18.28		
da min.	mounting dimension	19.2		5418
Da max.	mounting dimension	30.8		5418
ra max.	mounting dimension	0.6		5418
e	calculation factor	0.68		281
Y1	calculation factor	0.92		281
Y2	calculation factor	1.41		281
Y0	calculation factor	0.76		76
X	calculation factor	0.67		281

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article 3202 B TN 2RSA BI3 **Art-No.** 50023

calculation and operating data

load ratings	**dynamic C [N]**	**fatique load limit load Cu [N]**		**DIN/ISO**	**static Co [N]**	**DIN/ISO**
	11700	360		281	7030	76
speed of rotation limit	**reference n [1/min]**	**grease n [1/min]**	**oil n [1/min]**			
		12000				
operating temperature	**max. [°C]**	**min. [°C]**				
	120	-20				
bearing clearance	**axial min. [µm]**	**max. [µm]**				
	6	23				

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-66
Cage	PA66+GF25		
Sealing washers	St12/ACM		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.