general data/description

created: 04.03.2019 / 01 page: 1 / 2

article LR 5206 KDD U NS7 **Art-No.** 50039

brand SKA **weight/kg** 0.51

remark Tragzahlen gerechnet nach Normen für Wälzlager. Drehzahlen für F < 0.05 C0.


description

LR	Design
5206	Size
KDD	Shields on both sides, not touching
U	Crowned outer ring lateral surface

greasing

NS7	KYODO YUSHI MULTEMP SRL

dimensions and tolerances

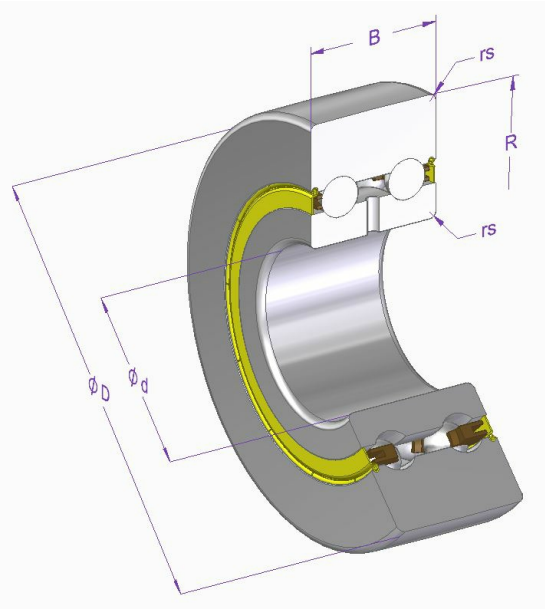

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	30	0 / -10	620-2
D	nominal outer diameter	72	0 / -50	WERKSNORM
B	width	23.8	0 / -120	620-2
rs min.	minimal chamfer dimension	1		
R	radius outer ring	500		
Crw [N]	Effective dynamic load rating	21300		
C0rw [N]	Effective static load rating	15500		
Curw [N]	Effective fatigue limit load	790		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	24400	920	281	17700	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		5000	

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	5	20

bearing clearance	axial min. [µm]	max. [µm]
	8	27

article LR 5206 KDD U NS7 **Art-No.** 50039

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-65
Cage	PA66		
Shields	St12		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.