general data/description


created: 28.02.2019 / 01 page: 1 / 1

article NU 211 E TVP2 HQS C3 **Art-No.** 50195 **brand** SKA **weight/kg** 0.645

description

NU	Design
211	Size
E	Reinforced version
TVP2	Plastic cage
HQS	Material
C3	Internal clearance

dimensions and tolerances

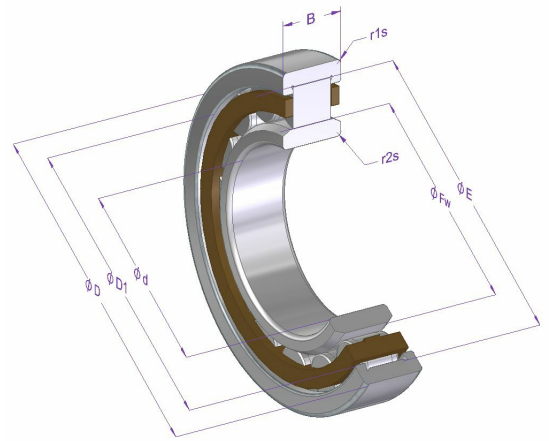

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	55	0 / -15	620-2
D	nominal outer diameter	100	0 / -15	620-2
B	width	21	0 / -150	620-2
r1s min.	minimal chamfer dimension	1.5		5412-1
r2s min.	minimal chamfer dimension	1.1		5412-1
Fw	inner enveloping circle diameter	66	0 / 20	5412-1
E	raceway diameter outer ring	90		5412-1
D1	outer shoulder diameter	86.2		
s	axial displacement	~ 1		
C3	internal clearance	0.06 / 0.09		620-4

calculation and operating data

load ratings	**dynamic C [N]**	**fatique load limit load Cu [N]**	**DIN/ISO**	**static Co [N]**	**DIN/ISO**
	84700	12100	281	96900	76

speed of rotation limit	**reference n [1/min]**	**grease n [1/min]**	**oil n [1/min]**
		5600	7100

operating temperature	**max. [°C]**	**min. [°C]**
	120	-20

bearing clearance	**radial min. [µm]**	**max. [µm]**
	60	90

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Cylindrical rollers	100Cr6	683-17	58-65
Cage	PA66 + GF25		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.