Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

general data/description


created: 01.03.2019 / 01 page: 1 / 1

article NU 2216 E M1 HQS C3 **Art-No.** 50219 **brand** SKA **weight/kg** 1.98

description

NU	Design
2216	Size
E	Reinforced version
M1	Brass cage, roller centered
HQS	Material
C3	Internal clearance

dimensions and tolerances

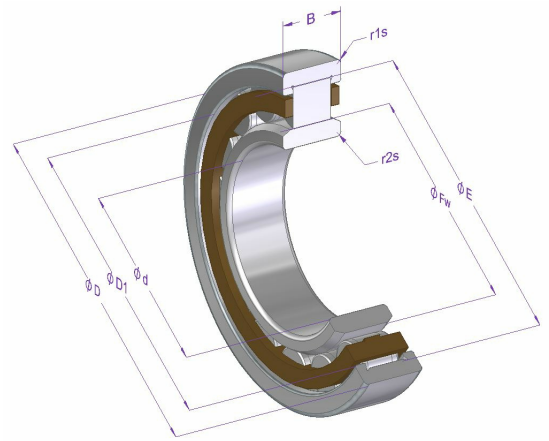

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	80	0 / -15	620-2
D	nominal outer diameter	140	0 / -18	620-2
B	width	33	0 / -150	620-2
r1s min.	minimal chamfer dimension	2		5412-1
r2s min.	minimal chamfer dimension	2		5412-1
Fw	inner enveloping circle diameter	95.3	0 / 20	5412-1
E	raceway diameter outer ring	127.3		5412-1
D1	outer shoulder diameter	123.1		
s	axial displacement	~ 2		
C3	internal clearance	0.065 / 0.1		620-4

calculation and operating data

load ratings	**dynamic C [N]**	**fatique load limit load Cu [N]**		**DIN/ISO**	**static Co [N]**	**DIN/ISO**
	186000	29900		281	244000	76
speed of rotation limit	**reference n [1/min]**	**grease n [1/min]**	**oil n [1/min]**			
		4000	5000			
operating temperature	**max. [°C]**	**min. [°C]**				
	120	-20				
bearing clearance	**radial min. [µm]**	**max. [µm]**				
	65	100				

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Cylindrical rollers	100Cr6	683-17	58-65
Cage	CuZn40Pb2		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.