Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

created: 09.04.2021 / 01 page: 1 / 2

article B 71901 E T DU L P4S **Art-No.** 50725


brand SKA **weight/kg** 0.022

remark Tolerance class P4S: dimensional accuracy P4, running accuracy P2, according DIN 620-2. Load and speed data refer to the single bearing. When installing in sets, please contact SKA's technical service.

description

B	Design
71901	size
E	Pressure angle
T	Hard tissue cage
DU	Layout
L	Slight preload
P4S	Tolerance class

dimensions and tolerances

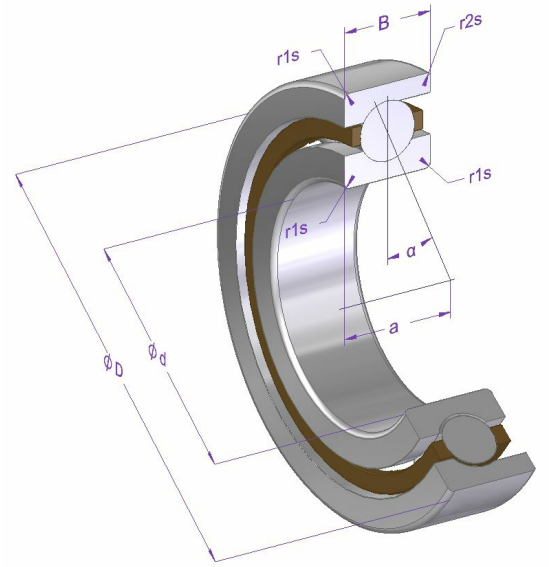

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	12	0 / -4	620-2
D	nominal outer diameter	24	0 / -5	620-2
B	width	6	0 / -80	620-2
r1s min.	minimal chamfer dimension	0.3		616
r2s min.	minimal chamfer dimension	0.3		616
a	load application point	7.2		
alpha	contact angle	25°		
E dT min.	Minimum diameter injection pitch	16.4		
E dT max.	Maximum diameter injection pitch	17.2		
Fv	pretension [N]	18		
c	axial stiffness [N/µm]	30.8		
KaE	Lift-off force [N]	53		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	3200	90	281	1770	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		60000	95000

operating temperature	max. [°C]	min. [°C]
	120	-20

article B 71901 E T DU L P4S **Art-No.** 50725

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-65
Cage	PF		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.