Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

general data/description

created: 12.06.2020 / 01 page: 1 / 2

article KRE 26 PP OP SK LX3 **Art-No.** 51085 **brand** SKA **weight/kg** 0.062

remark Load ratings calculated according norms for rolling bearings. Rotational speed for F < 0.05 C0rw.


description

KRE	Design
26	Size
PP	Seals on both sides
OP	Optimized profile
SK	Hexagon socket

greasing

LX3	SHELL GADUS S3 V220C 2

dimensions and tolerances

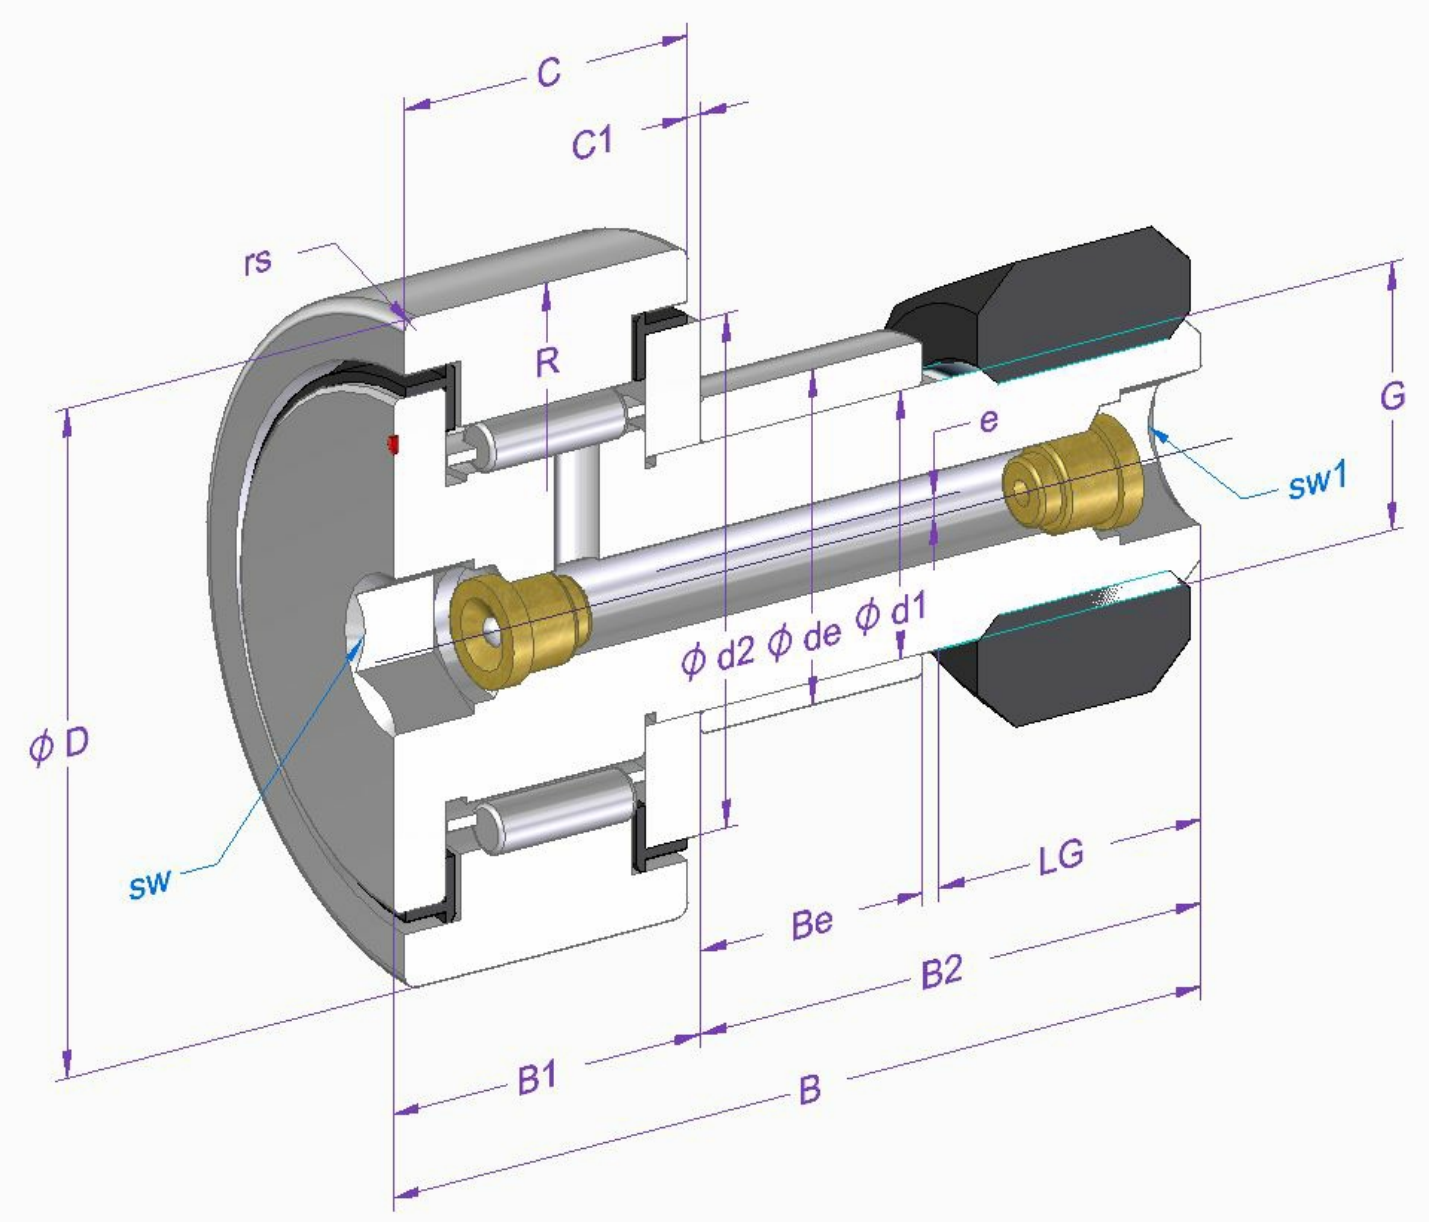

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d1	shaft diameter	10	0 / -15	WERKSNORM
d2	inner shoulder diameter	17.5		
de	eccentric diameter	13	0 / -43	WERKSNORM
e	eccentricity	0.5		
D	nominal outer diameter	26	0 / -50	WERKSNORM
C	outer ring width	12	0 / -120	620-2
C1	distance	0.6		

article KRE 26 PP OP SK LX3 **Art-No.** 51085

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
B	length	36	-300 / 600	WERKSNORM
B1 max.	width	13.2		
B2	shaft lenght	23		
Be	eccentric length	10		
rs min.	minimal chamfer dimension	0.3		
sw	wrench size	5		
LG	thread length	12		
G	thread	M10 x 1		
R	radius	OP		
Crw [N]	Effective dynamic load rating	5100		
C0rw [N]	Effective static load rating	5270		
Curw [N]	Effective fatigue limit load	580		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	5300	720	281	5830	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		8000	

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	0	25

material specification

description	material	DIN/ISO	hardness
Outer ring	100Cr6	683-17	58-65
Roller stud	16CrMo4		
Needle rollers	100Cr6	683-17	58-65
Thrust washer	100Cr6	683-17	58-65
Seals	PA66		
Cage	Sheet steel		
Eccentric ring	100Cr6	683-17	683-17

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.