general data/description

created: 28.07.2020 / 01 page: 1 / 2


article B 71912 E T U L P4S **Art-No.** 51176 **brand** SKA **weight/kg** 0.193

remark Tolerance class P4S: dimensional accuracy P4, running accuracy P2, according DIN 620-2.

description

B	Design
71912	Size
E	Pressure angle
T	Hard tissue cage
U	Universally pairable
L	Slight preload
P4S	Tolerance class

dimensions and tolerances

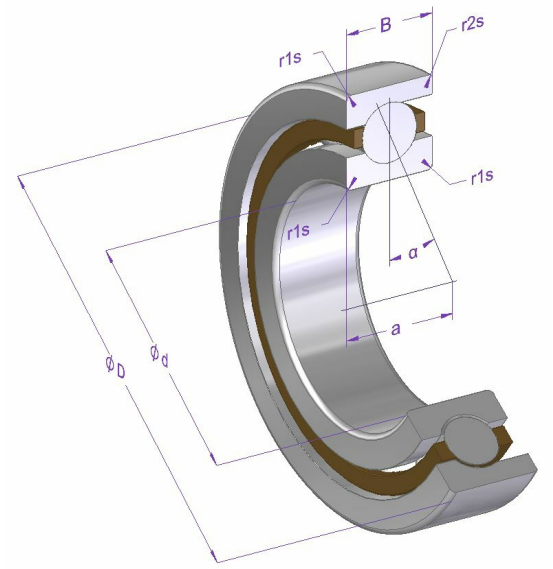

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	60	0 / -7	620-2
D	nominal outer diameter	85	0 / -8	620-2
B	width	13	0 / -150	620-2
r1s min.	minimal chamfer dimension	1		616
r2s min.	minimal chamfer dimension	0.3		WERKSNORM
a	load application point	23.4		
alpha	contact angle	25°		
Fv	pretension [N]	155		
c	axial stiffness [N/µm]	124		
KaE	Lift-off force [N]	448		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	22700	1120	281	21600	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		14000	22000

operating temperature	max. [°C]	min. [°C]
	120	-20

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-65
Cage	PF		

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article B 71912 E T U L P4S **Art-No.** 51176

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.