general data/description


created: 29.01.2021 / 01 page: 1 / 2

article 23030 E M W33 C3 **Art-No.** 51562 **brand** SKA **weight/kg** 7.75

description

23030	Size
E	Reinforced version
M	Brass cage, roller centered
W33	Lubrication groove and -hole in outer ring
C3	Internal clearance

dimensions and tolerances

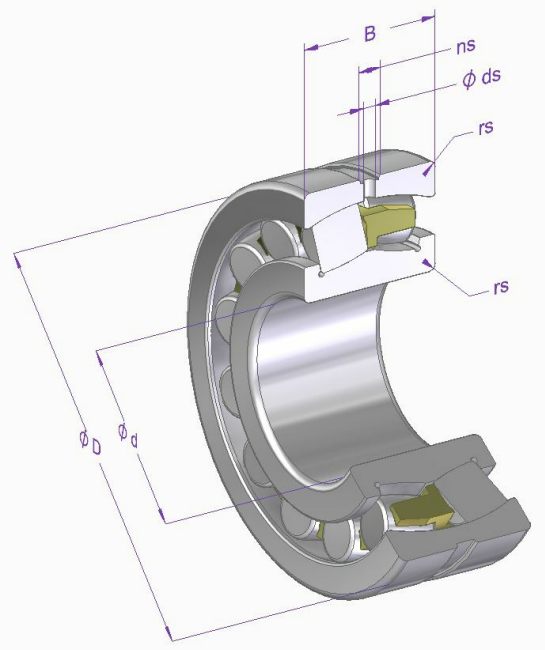

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	150	0 / -25	620-2
D	nominal outer diameter	225	0 / -30	620-2
B	width	56	0 / -250	620-2
rs min.	minimal chamfer dimension	2.1		635-2
ns	lubrication groove width	8		
ds	diameter lubrication hole	6x Ø5		
C3	internal clearance	0.17 / 0.22		620-4
e	calculation factor	0.22		
Y1	calculation factor	3.0		
Y2	calculation factor	4.48		
Y0	calculation factor	2.94		
X0	calculation factor	1		
X1	calculation factor	1		
X2	calculation factor	0.67		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	474000	72500	281	808000	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		1400	1800

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	170	220

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article 23030 E M W33 C3 **Art-No.** 51562

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Spherical rollers	100Cr6	683-17	58-65
Cage	CuZn40Pb2		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.