Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

created: 17.05.2021 / 01

article 23218 E M W33 C3 **Art-No.** 51679


brand SKA **weight/kg** 4.54

remark Y-Faktoren: Y1: Fa/Fr <= e / Y2: Fa/Fr > e / X-Faktoren: X1: Fa/Fr <= e / X2: Fa/Fr > e

description

23218	Size
E	Reinforced version
M	Brass cage, roller centered
W33	Lubrication groove and -hole in outer ring
C3	Internal clearance

dimensions and tolerances

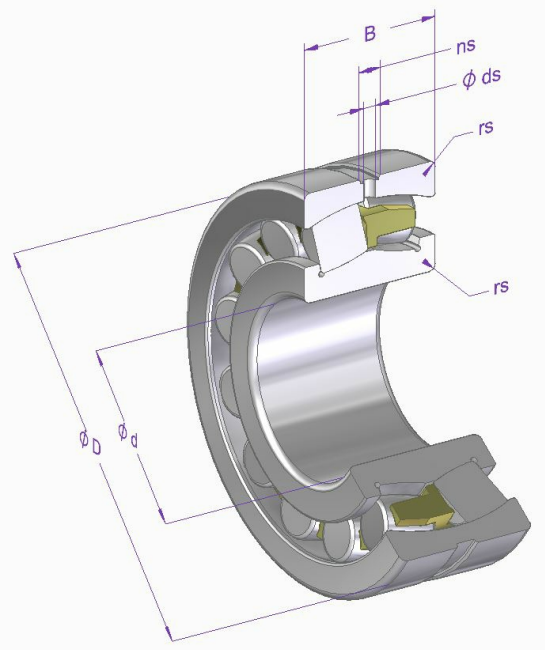

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	90	0 / -20	620-2
D	nominal outer diameter	160	0 / -25	620-2
B	width	52.4	0 / -200	620-2
rs min.	minimal chamfer dimension	2		635-2
ns	lubrication groove width	5.5		
ds	diameter lubrication hole	3x Ø3		
e	calculation factor	0.31		281
Y1	calculation factor	2.1		281
Y2	calculation factor	3.2		281
Y0	calculation factor	2.1		76
X0	calculation factor	1		76
X1	calculation factor	1		281
X2	calculation factor	0.67		281

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	329000	41000	281	469000	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		1900	2600

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	100	135

article 23218 E M W33 C3 **Art-No.** 51679

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Spherical rollers	100Cr6	683-17	58-65
Cage	CuZn40Pb2		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.