general data/description

created: 11.11.2026 / 01 page: 1 / 2

article B 7201 E T P4S UL **Art-No.** 51806


brand SKA **weight/kg** 0.043

description

B	Design
7201	Size
E	Pressure angle
T	Hard tissue cage
P4S	Tolerance class
UL	Universally pairable, Slight preload

remark Tolerance class P4S: dimensional accuracy P4, running accuracy P2, according DIN 620-2. The tolerances and the load rating and rotation speed information refer to the single bearing. The valid factors for bearing sets must be observed. In case of doubt, contact the technical service of SKA.

dimensions and tolerances

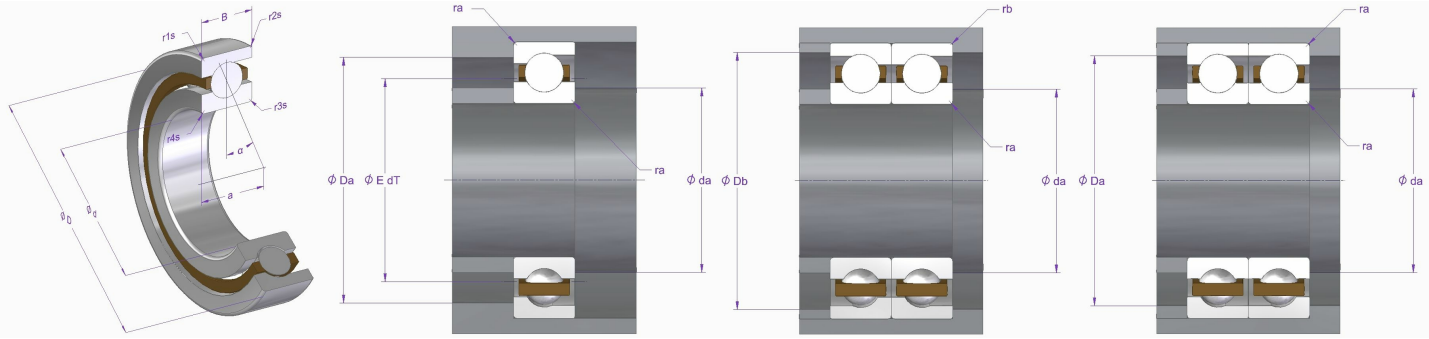

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	12	0 / -4	620-2
D	nominal outer diameter	32	0 / -6	620-2
B	width	10	0 / -80	620-2
r1s min.	minimal chamfer dimension	0.6		628-1
r2s min.	minimal chamfer dimension	0.6		WERKSNORM
r3s min.	minimal chamfer dimension	0.6		628-1
r4s min.	minimal chamfer dimension	0.6		628-1
alpha	contact angle	25°		
a	load application point	~10.1		
da	mounting dimension	16.3	0 / 200	WERKSNORM
Da	mounting dimension	27.5	0 / 200	WERKSNORM
ra max.	mounting dimension	0.6		5418
db	mounting dimension	16.3	0 / 200	WERKSNORM
Db max.	mounting dimension	29.5		WERKSNORM
rb max.	mounting dimension	0.3		5418
Fv	pretension [N]	47		
c	axial stiffness [N/µm]	43		
KaE	Lift-off force [N]	137		
E dT	Diameter injection pitch	19.2	0 / 1100	WERKSNORM

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	7560	174	281	3340	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		45000	67000

operating temperature	max. [°C]	min. [°C]
	100	-30

article B 7201 E T P4S UL **Art-No.** 51806

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-66
Cage	PF		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.