general data/description

created: 20.04.2022 / 02 page: 1 / 3

article 22228 E W33 C3 **Art-No.** 52374

brand SKA **weight/kg** 14.50

remark Y-factors: Y1: Fa/Fr <= e / Y2: Fa/Fr > e / X-factors: X1: Fa/Fr <= e / X2: Fa/Fr > e.


description

22228	Size
E	Reinforced version
W33	Lubrication groove and -hole in outer ring
C3	Internal clearance

dimensions and tolerances

article 22228 E W33 C3 **Art-No.** 52374

dimensions and tolerances

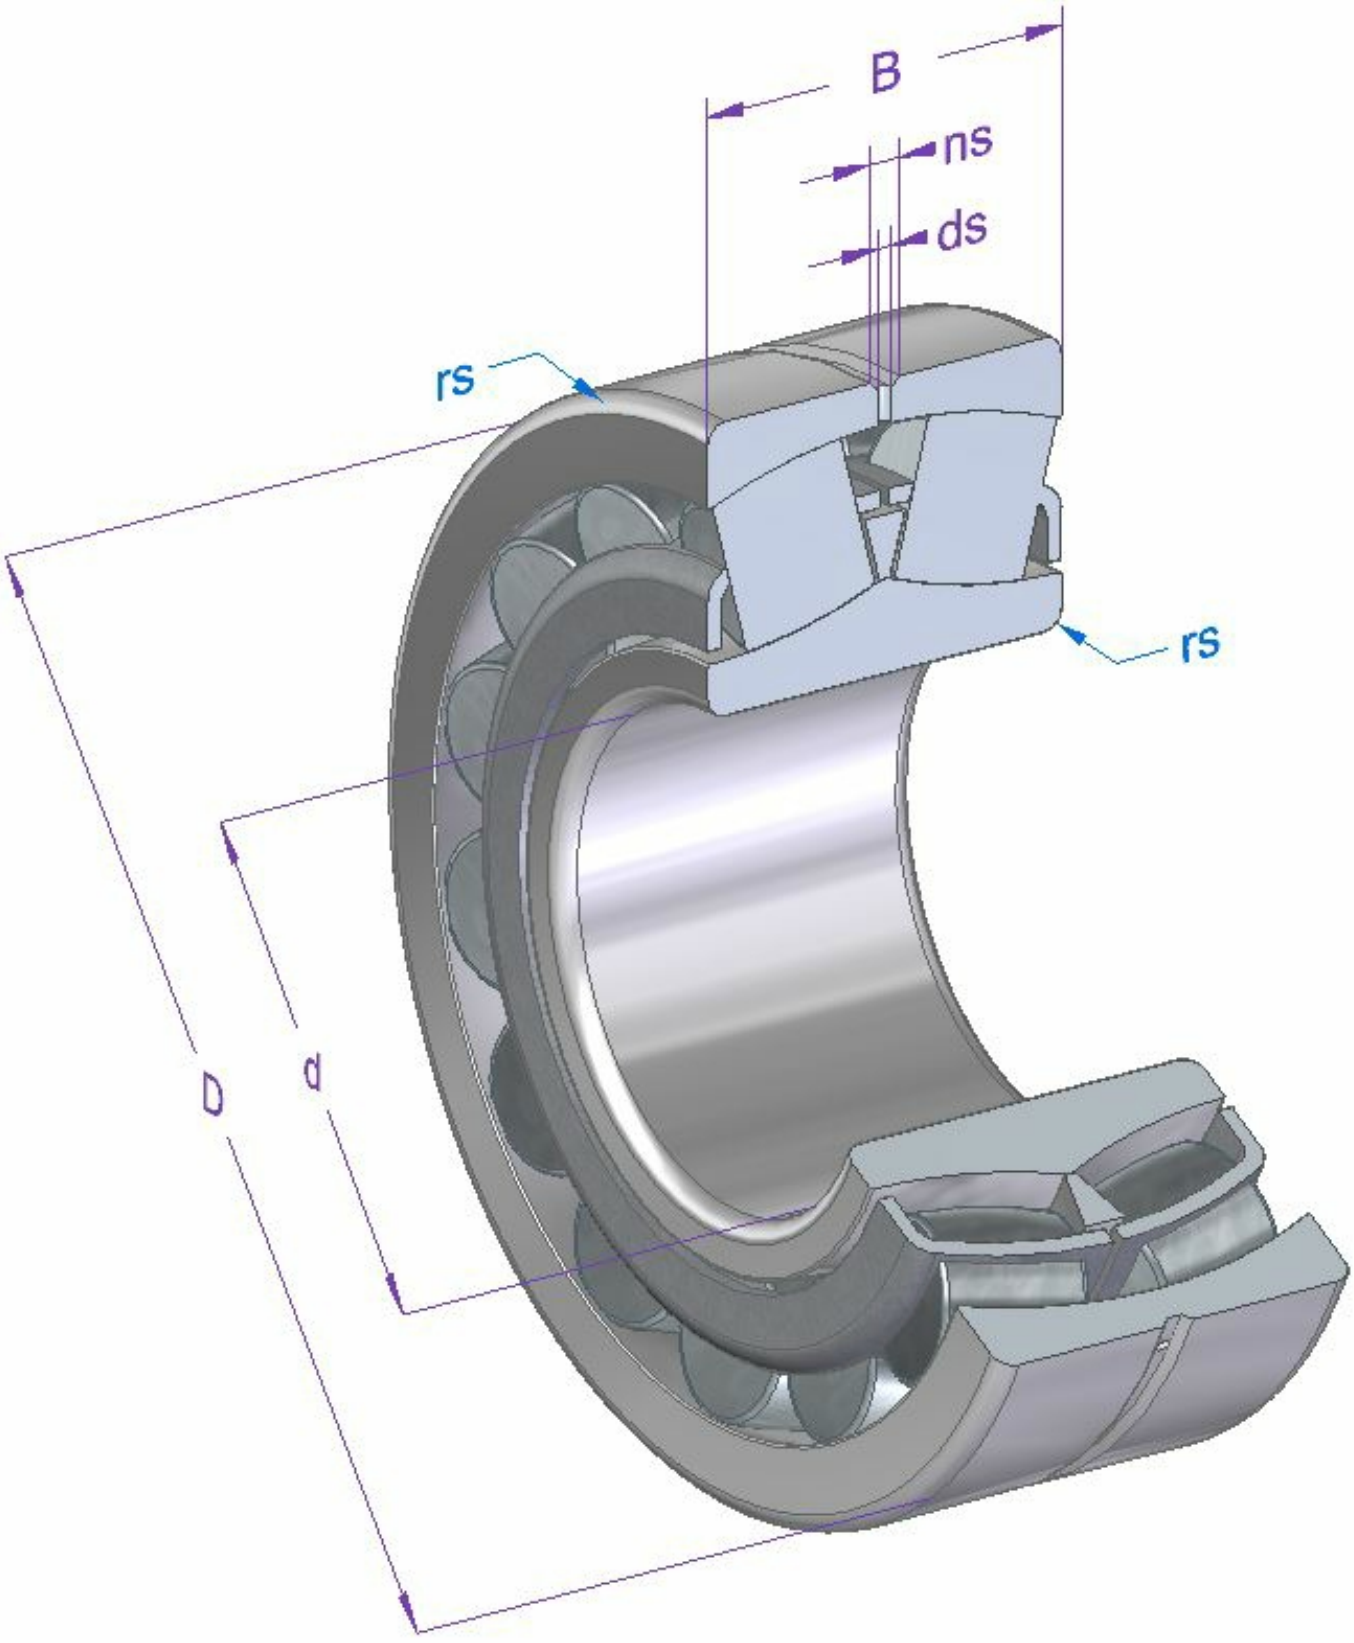

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	140	0 / -25	620-2
D	nominal outer diameter	250	0 / -30	620-2

article 22228 E W33 C3 **Art-No.** 52374

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
B	width	68	0 / -250	620-2
rs min.	minimal chamfer dimension	3		635-2
ns	lubrication groove width	11.1		WERKSNORM
ds	diameter lubrication hole	3x Ø6		WERKSNORM
C3	internal clearance	0.145 / 0.190		620-4
e	calculation factor	0.27		281
Y1	calculation factor	2.49		281
Y2	calculation factor	3.71		281
Y0	calculation factor	2.43		76
X0	calculation factor	1		76
X1	calculation factor	1		281
X2	calculation factor	0.67		281

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	656000	88400	281	922000	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		1400	1700

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	145	190

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Spherical rollers	100Cr6	683-17	58-66
Cage	Sheet steel		
Guide ring	PM Steel		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.