Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

created: 26.10.2022 / 02 page: 1 / 2


article B 7205 E T U M P4S **Art-No.** 52427 **brand** SKA **weight/kg** 0.125

remark Tolerance class P4S: dimensional accuracy P4, running accuracy P2, according DIN 620-2.

description

B	Design
7205	Size
E	Pressure angle
T	Hard tissue cage
U	Universally pairable
M	Medium preload
P4S	Tolerance class

dimensions and tolerances

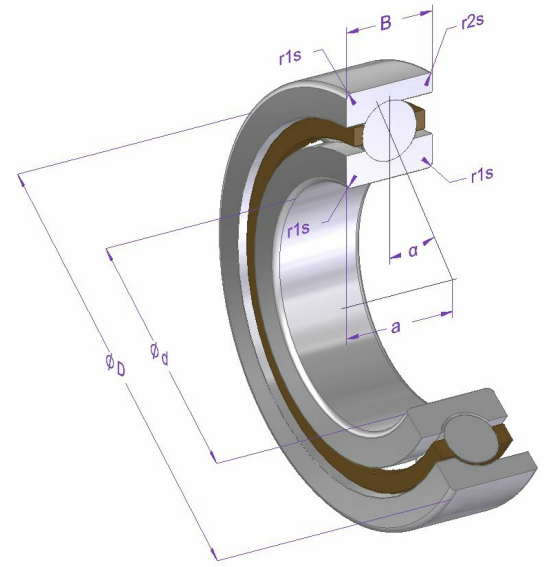

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	25	0 / -5	620-2
D	nominal outer diameter	52	0 / -7	620-2
B	width	15	0 / -120	620-2
r1s min.	minimal chamfer dimension	1		616
r2s min.	minimal chamfer dimension	1		WERKSNORM
a	load application point	16.5		
alpha	contact angle	25°		
E dT min.	Minimum diameter injection pitch	35.3		WERKSNORM
E dT max.	Maximum diameter injection pitch	35.7		WERKSNORM
Fv	pretension [N]	425		
c	axial stiffness [N/µm]	115		
KaE	Lift-off force [N]	1293		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	15000	465	281	9000	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		26'000	40'000

operating temperature	max. [°C]	min. [°C]
	120	-20

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-65
Cage	PF		

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article B 7205 E T U M P4S **Art-No.** 52427

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.