general data/description

created: 28.07.2022 / 01 page: 1 / 2


article UCP 212 UZ1 **Art-No.** 52471 **brand** SKA **weight/kg** 4.70

description
UCP Design

greasing
UZ1 UNIVERSAL ZR-LN1

remark Rotational speed is reference value for shaft tolerance h7. Also depending on load and seal.

dimensions and tolerances

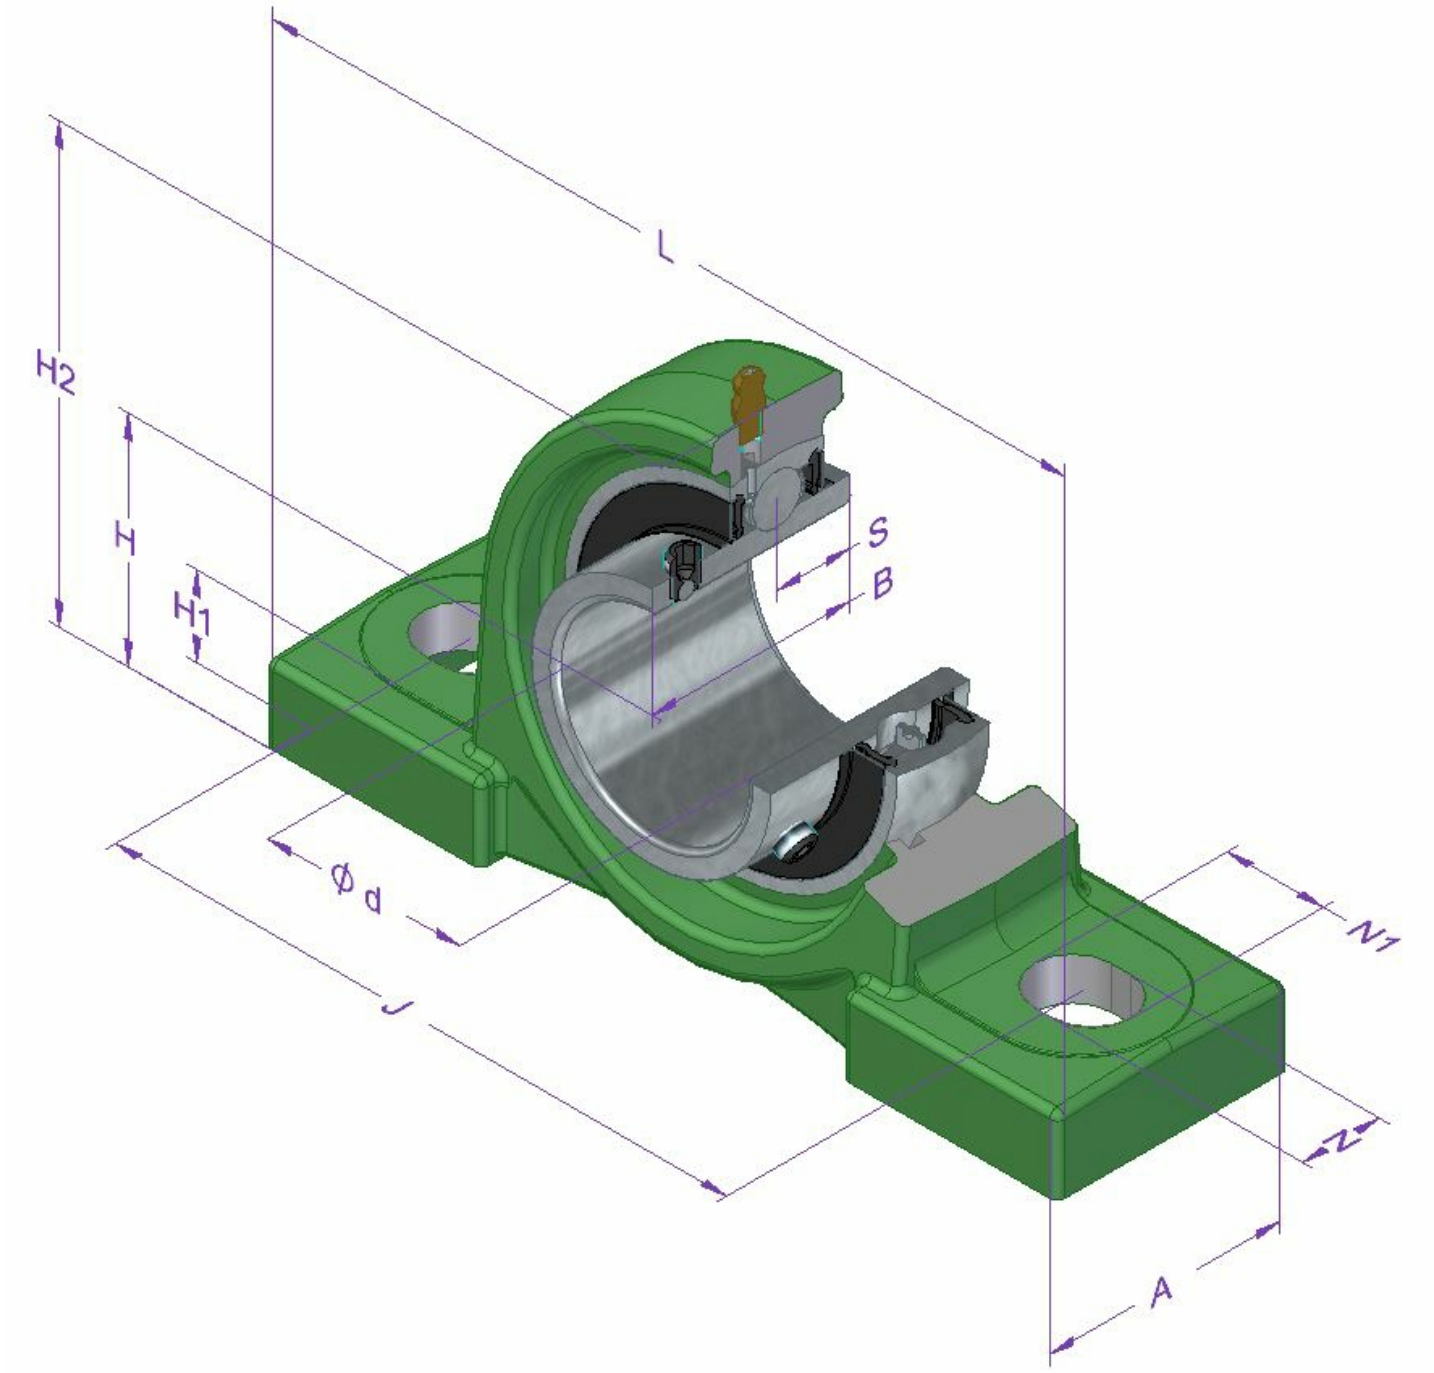

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	60	0 / 24	626-1
L	housing length	241		626-2
J	hole spacing	186	-1000 / 1000	626-2
H	mirror height	69.9	-200 / 200	626-2
H1	dedendum	24		626-2
H2	total height	137		
A	housing width	70		626-2

article UCP 212 UZ1 **Art-No.** 52471

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
B	inner ring width	65.1	0 / -120	626-1
S	swing axle distance	25.4		626-1
N	hole witdth	20		
N1	hole length	23		
sw	wrench size	5		
G	thread	M10x1.25		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	47800	1710	281	33000	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		1900	

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	23	43

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-65
Cage	Sheet steel		
Seals	Sheet steel/NBR		
Centrifugal disc	Sheet steel		
Housing	GG20		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.