Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

general data/description

created: 02.11.2022 / 01 page: 1 / 2

article UCFL 206 UZ1 **Art-No.** 52706 **brand** SKA **weight/kg** 0.96

description


UCFL Design
206 Size

greasing

UZ1 UNIVERSAL ZR-LN1

remark Rotational speed is reference value for shaft tolerance h7. Also depending on load and seal.

dimensions and tolerances

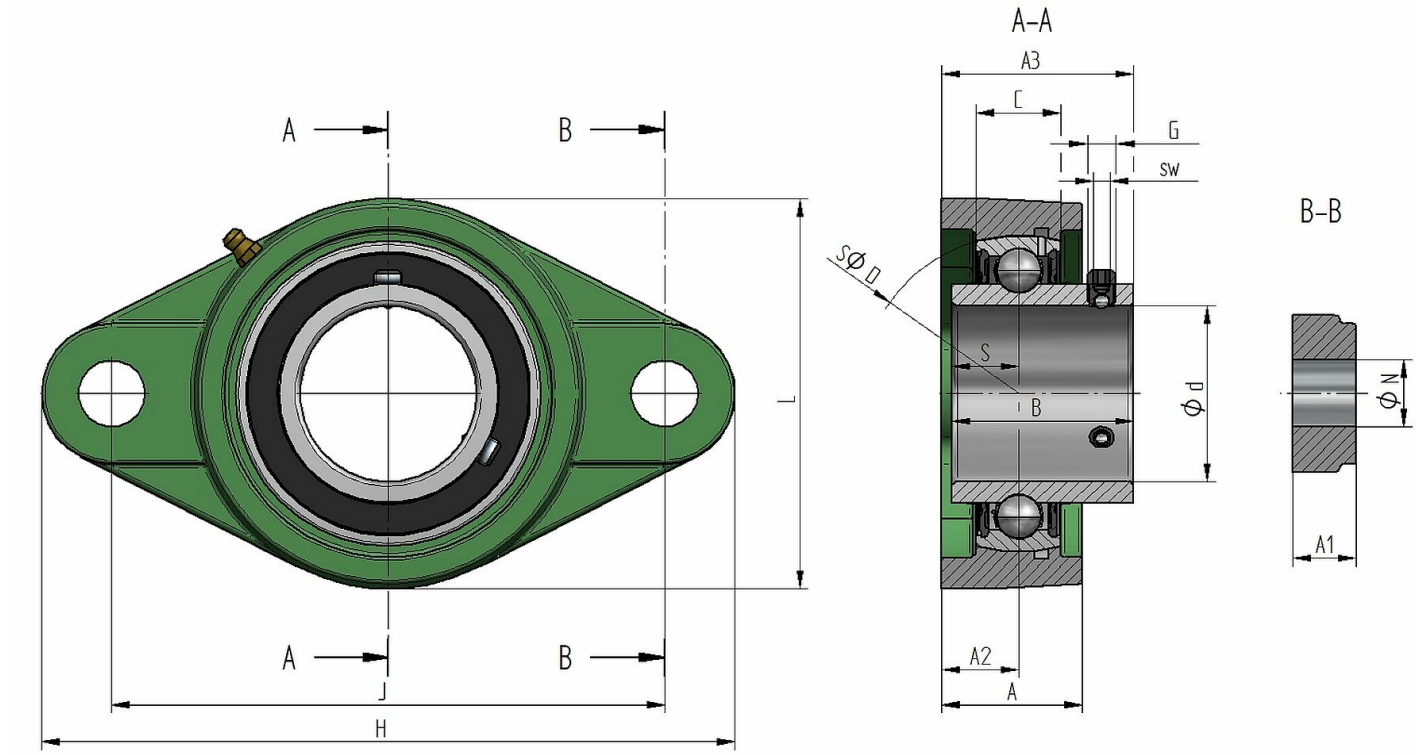

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	30	0 / 18	626-1
D	nominal outer diameter	62	0 / -13	620-2
B	inner ring width	38.1	0 / -120	626-1
C	outer ring width	19	0 / -120	626-1
S	swing axle distance	15.9		626-1
A	housing height	31		626-2
A1	flange thickness	13		626-2
A2	effect distance	18	-400 / 400	626-2
A3	total width	40.2		
J	hole spacing	117	-500 / 500	626-2
H	housing length	148		
L	housing width	80		626-2
N	hole diameter	16		
sw	wrench size	3		
G	thread	M6x1		

article UCFL 206 UZ1 **Art-No.** 52706

calculation and operating data

load ratings	**dynamic C [N]**	**fatique load limit load Cu [N]**		**DIN/ISO**	**static Co [N]**	**DIN/ISO**
	19500	580		281	11300	76
speed of rotation limit	**reference n [1/min]**	**grease n [1/min]**	**oil n [1/min]**			
		4000				
operating temperature	**max. [°C]**	**min. [°C]**				
	120	-20				
bearing clearance	**radial min. [µm]**	**max. [µm]**				
	13	28				

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-65
Cage	Sheet steel		
Seals	Sheet steel/NBR		
Centrifugal disc	Sheet steel		
Housing	GG20		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.