general data/description

created: 27.05.2025 / 02 page: 1 / 2

article 3316 B TN LX5 **Art-No.** 54275 **brand** SKA **weight/kg** 5.60

remark Y-factors: Y1: Fa/Fr <= e / Y2: Fa/Fr > e.


description


3316	Size
B	Pressure angle
TN	Plastic cage

greasing

LX5	SHELL GADUS S2 V100 3

dimensions and tolerances

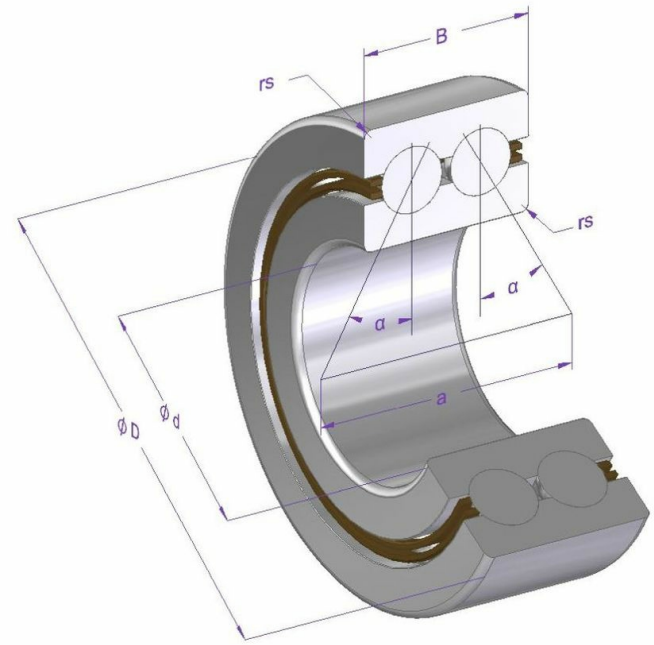

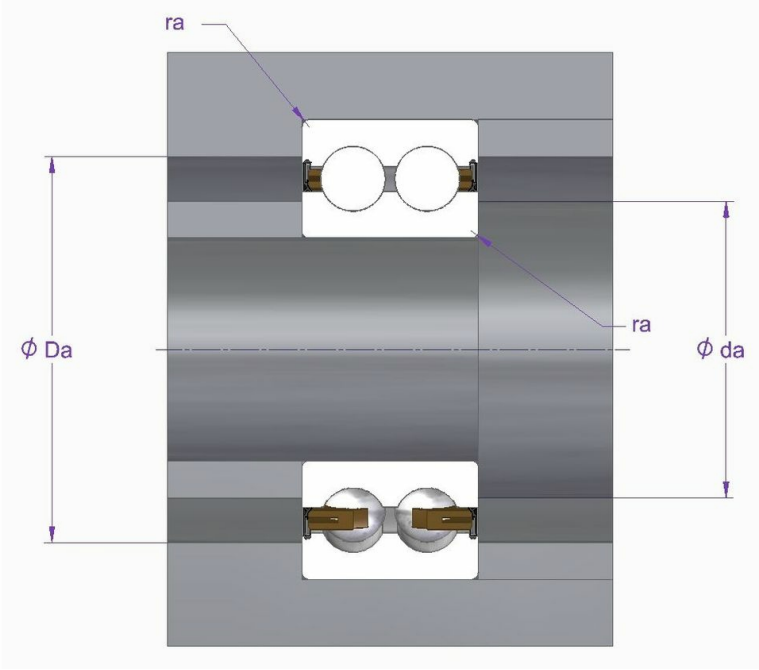

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	80	0 / -15	620-2
D	nominal outer diameter	170	0 / -25	620-2
B	width	68.3	0 / -150	620-2
rs min.	minimal chamfer dimension	2.1		628-3
alpha	contact angle	30°		628-3
a	load application point	~101.5		
da min.	mounting dimension	97		WERKSNORM
Da max.	mounting dimension	154.5		WERKSNORM
ra max.	mounting dimension	2.1		5418
e	calculation factor	0.8		281
Y1	calculation factor	0.78		281
Y2	calculation factor	1.24		281
Y0	calculation factor	0.66		76
X	calculation factor	0.63		281

calculation and operating data

load ratings	**dynamic C [N]**	**fatique load limit load Cu [N]**		**DIN/ISO**	**static Co [N]**	**DIN/ISO**
	182000	7380		281	158000	76
speed of rotation limit	**reference n [1/min]**	**grease n [1/min]**	**oil n [1/min]**			
		3800				
operating temperature	**max. [°C]**	**min. [°C]**				
	120	-30				
bearing clearance	**axial min. [µm]**	**max. [µm]**				
	15	40				

article 3316 B TN LX5 **Art-No.** 54275

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-66
Cage	PA66+GF25		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.