Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

created: 18.05.2026 / 01

article KRV 19 PP OP SK LX3 **Art-No.** 54832

brand SKA **weight/kg** 0.031

remark Load ratings calculated according norms for rolling bearings. Rotational speed for F < 0.05 C0rw. Load ratings and rotational speed also depending on mating track. Temperature limit due to the seal.


description

KRV	Design
19	Size
PP	Seals on both sides
OP	Optimized profile
SK	Hexagon socket

greasing

LX3	SHELL GADUS S3 V220C 2

dimensions and tolerances

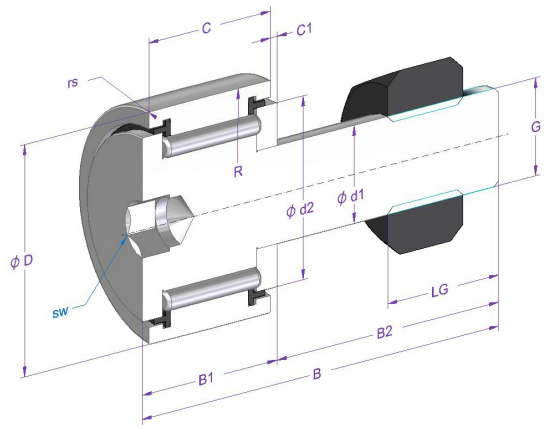

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d1	shaft diameter	8	0 / -15	ISO 7063
d2	inner shoulder diameter	15		
D	nominal outer diameter	19	0 / -50	ISO 7063
C	outer ring width	11	0 / -120	ISO 7063
C1	distance	0.6		ISO 7063
B	length	32	-300 / 600	WERKSNORM
B1 max.	width	12.2		ISO 7063
B2	shaft lenght	20		ISO 7063
G	thread	M8x1.25		ISO 7063
LG	thread length	10		ISO 7063
sw	wrench size	4		
rs min.	minimal chamfer dimension	0.15		ISO 7063
R	radius	OP		
Crw [N]	Effective dynamic load rating	6160		
C0rw [N]	Effective static load rating	6450		
Curw [N]	Effective fatigue limit load	610		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	7680	1400	281	9890	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		3100	

operating temperature	max. [°C]	min. [°C]
	100	-20

bearing clearance	radial min. [µm]	max. [µm]
	10	35

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article KRV 19 PP OP SK LX3 **Art-No.** 54832

material specification

description	material	DIN/ISO	hardness
Outer ring	100Cr6	683-17	58-65
Roller stud	16CrMo4		
Needle rollers	100Cr6	683-17	58-66
Thrust washer	100Cr6	683-17	58-65
Seals	PA66		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.