general data/description

created: 10.07.2026 / 02 page: 1 / 2

article 3208 B TN 2RS LX5 **Art-No.** 54909 **brand** SKA **weight/kg** 0.655

remark Y-factors: Y1: Fa/Fr <= e / Y2: Fa/Fr > e.


description


3208	Size
B	Pressure angle
TN	Plastic cage
2RS	Sealing washers on both sides, touching

greasing

LX5	SHELL GADUS S2 V100 3

dimensions and tolerances

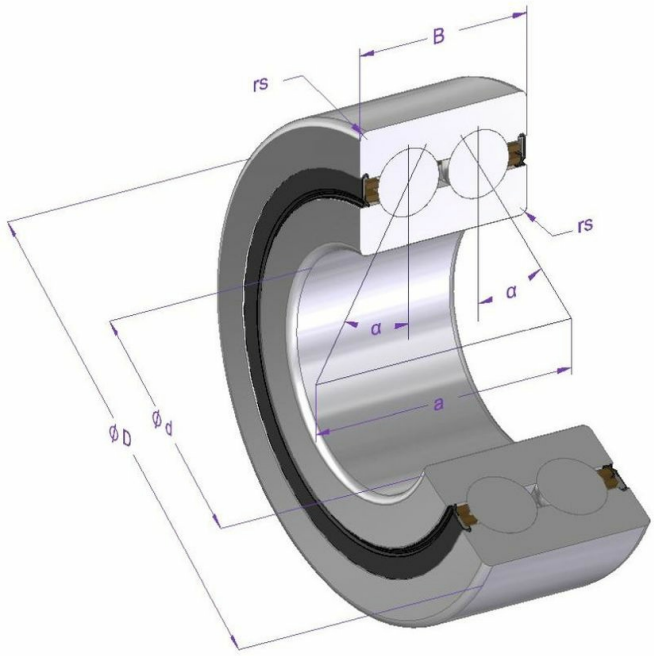

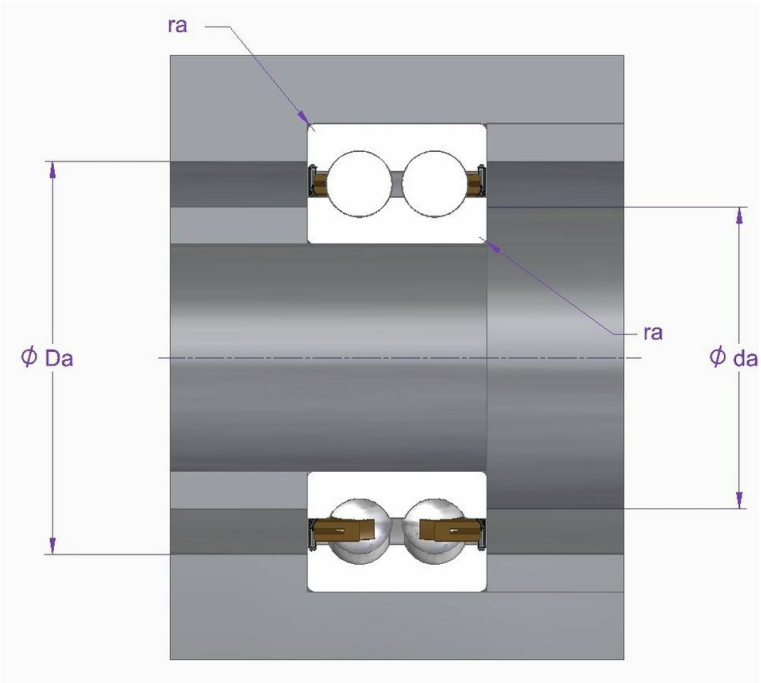

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	40	0 / -12	620-2
D	nominal outer diameter	80	0 / -13	620-2
B	width	30.2	0 / -120	620-2
r1s min.	minimal chamfer dimension	1.1		628-3
r2s min.	minimal chamfer dimension	1.1		628-3
alpha	contact angle	30°		628-3
a	load application point	~47		
Da max.	mounting dimension	72.2		WERKSNORM
da min.	mounting dimension	48.3		WERKSNORM
ra max.	mounting dimension	1		5418
e	calculation factor	0.8		281
Y1	calculation factor	0.78		281
Y2	calculation factor	1.24		281
Y0	calculation factor	0.66		76
X	calculation factor	0.63		281

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article 3208 B TN 2RS LX5 **Art-No.** 54909

calculation and operating data

load ratings	**dynamic C [N]**	**fatique load limit load Cu [N]**		**DIN/ISO**	**static Co [N]**	**DIN/ISO**
	44700	1660		281	31900	76
speed of rotation limit	**reference n [1/min]**	**grease n [1/min]**	**oil n [1/min]**			
		4800				
operating temperature	**max. [°C]**	**min. [°C]**				
	120	-40				
bearing clearance	**axial min. [µm]**	**max. [µm]**				
	9	29				

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-66
Cage	PA66+GF25		
Sealing washers	St12/NBR		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.