general data/description

created: 28.08.2014 / 05 page: 1 / 2

article UCF 206 HA2 **Art-No.** 43903 **brand** SKA **weight/kg** 1.10

description


UCF Design
206 Size

remark Rotational speed is reference value for shaft tolerance h7. Also depending on load and seal.

greasing

HA2 HANGU2#, GREAT WALL MOTOR BEARING GREASE

dimensions and tolerances

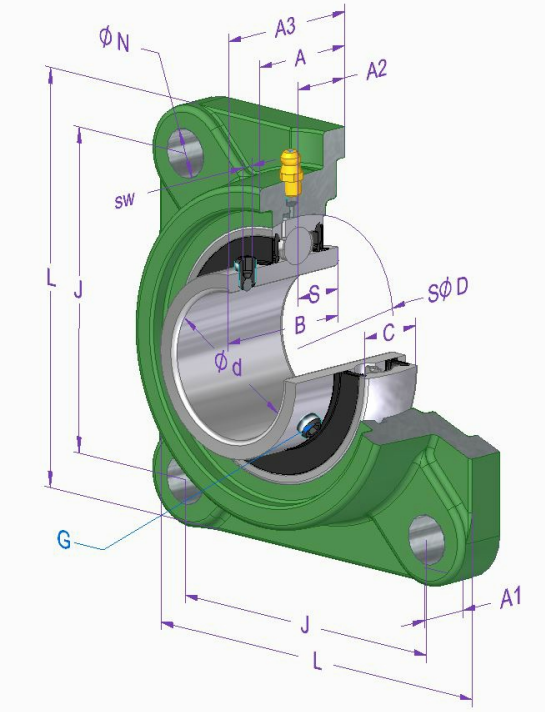

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	30	0 / 18	626-1
D	nominal outer diameter	62	0 / -13	620-2
B	inner ring width	38.1	0 / -120	626-1
C	outer ring width	19	0 / -120	626-1
S	swing axle distance	15.9		626-1
A	housing width	31		626-2
A1	flange thickness	14.3		626-2
A2	effect distance	18.5	-500 / 500	626-2
A3	total width	40.2		
J	hole spacing	83	-700 / 700	626-2
L	housing length	108		626-2
N	hole diameter	12		626-2
sw	wrench size	3		
G	thread	M6x0.75		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	19500		281	10900	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		4000	

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	13	28

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article UCF 206 HA2 **Art-No.** 43903

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-65
Cage	Sheet steel		
Seals	Sheet steel/NBR		
Centrifugal disc	Sheet steel		
Housing	GG20		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.