Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

created: 26.11.2015 / 04

article 3808 B TN 2RS NS7 **Art-No.** 45822

brand SKA **weight/kg** 0.04

remark Y-factors: Y1: Fa/Fr <= e / Y2: Fa/Fr > e.


description

3808	Size
B	Pressure angle
TN	Plastic cage
2RS	Sealing washers on both sides, touching

greasing

NS7	KYODO YUSHI MULTEMP SRL

dimensions and tolerances

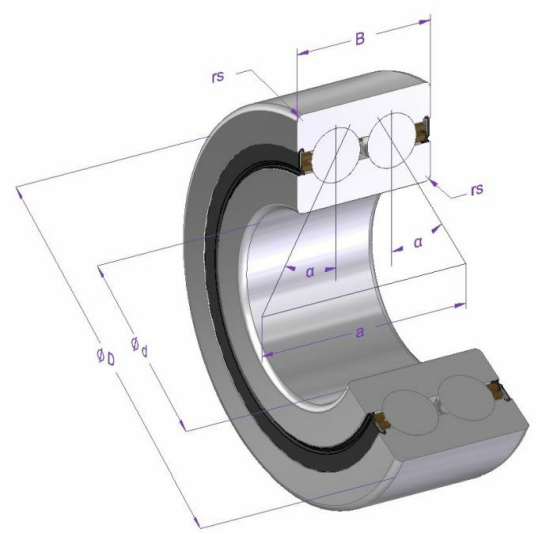

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	40	0 / -12	620-2
D	nominal outer diameter	52	0 / -13	620-2
B	width	10	0 / -120	620-2
rs min.	minimal chamfer dimension	0.3		616
a	load application point	~22.4		
alpha	contact angle	25°		
e	calculation factor	0.68		281
Y1	calculation factor	0.92		281
Y2	calculation factor	1.41		281
Y0	calculation factor	0.76		76
X	calculation factor	0.67		281

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	6690	412	281	7920	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		6000	

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	axial min. [µm]	max. [µm]
	9	29

article 3808 B TN 2RS NS7 **Art-No.** 45822

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-66
Cage	PA66+GF25		
Sealing washers	Sheet steel/NBR		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.