general data/description

created: 24.10.2018 / 04 page: 1 / 2

article 3810 B TN ZZ NS7 **Art-No.** 46079 **brand** SKA **weight/kg** 0.07

remark Y-factors: Y1: Fa/Fr <= e / Y2: Fa/Fr > e.


description

3810	Size
B	Pressure angle
TN	Plastic cage
ZZ	Shields on both sides, not touching

greasing

NS7	KYODO YUSHI MULTEMP SRL

dimensions and tolerances

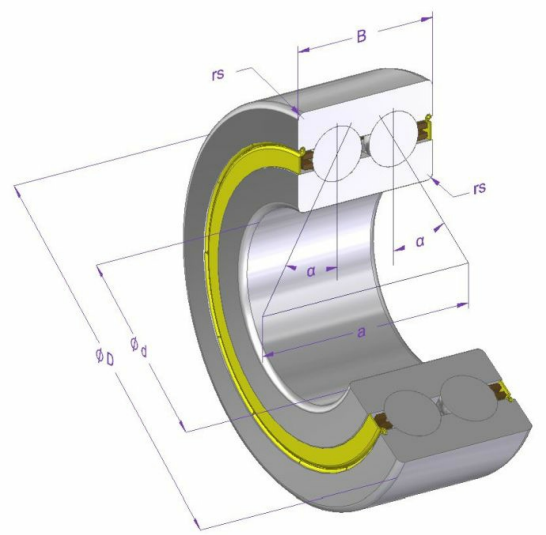

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	50	0 / -12	620-2
D	nominal outer diameter	65	0 / -13	620-2
B	width	12	0 / -120	620-2
rs min.	minimal chamfer dimension	0.3		616
alpha	contact angle	30°		
a	load application point	~36.4		
e	calculation factor	0.8		281
Y1	calculation factor	0.78		281
Y2	calculation factor	1.24		281
Y0	calculation factor	0.66		76
X	calculation factor	0.63		281

calculation and operating data

load ratings	**dynamic C [N]**	**fatique load limit load Cu [N]**	**DIN/ISO**	**static Co [N]**	**DIN/ISO**
	6950	495	281	9580	76

speed of rotation limit	**reference n [1/min]**	**grease n [1/min]**	**oil n [1/min]**
		5400	

operating temperature	**max. [°C]**	**min. [°C]**
	120	-20

bearing clearance	**axial min. [µm]**	**max. [µm]**
	11	33

article 3810 B TN ZZ NS7 **Art-No.** 46079

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-66
Cage	PA66+GF25		
Shields	Sheet steel		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.