Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

article 6006 2RS BI2 **Art-No.** 49114 **brand** SKA **weight/kg** 0.116


description

6006	Size
2RS	Sealing washers on both sides, touching

greasing

BI2	KLÜBER ISOFLEX TOPAS L32

dimensions and tolerances

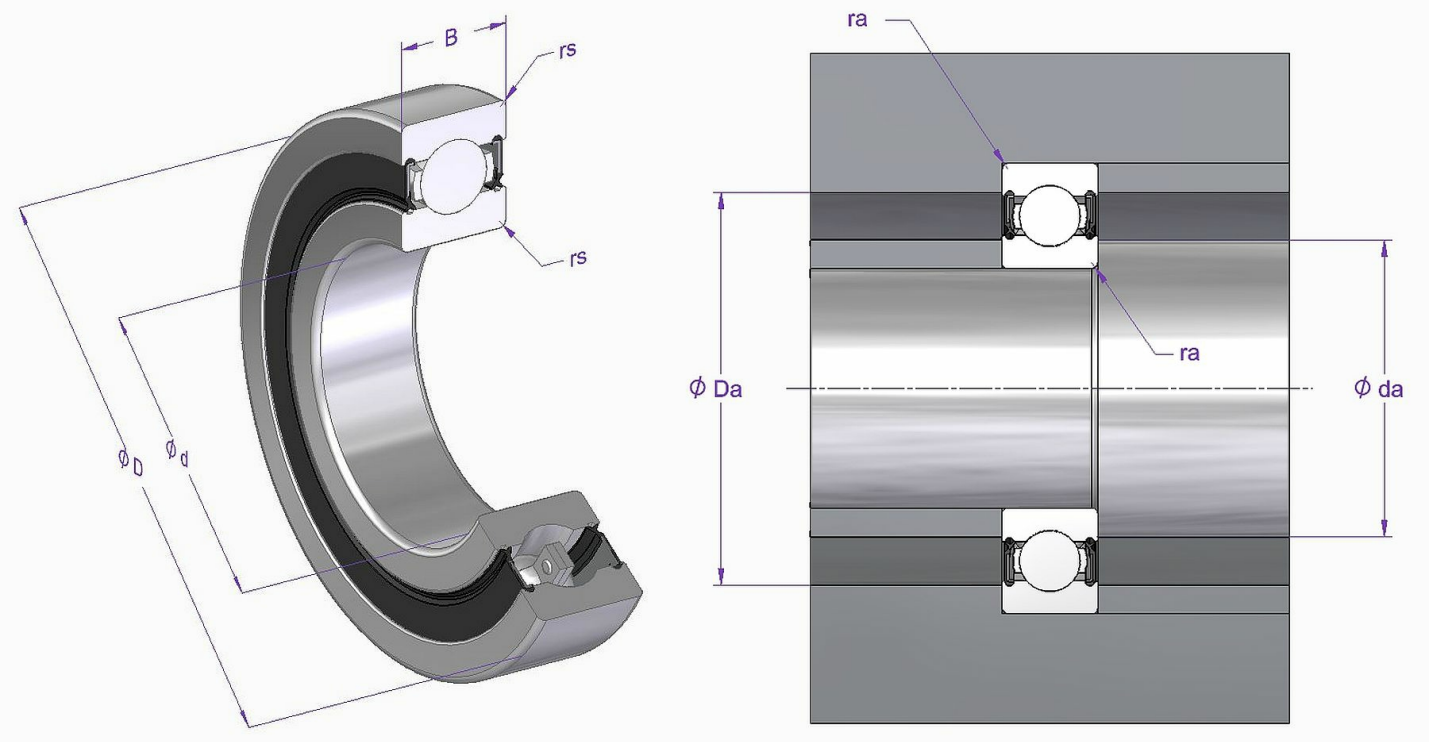

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	30	0 / -10	620-2
D	nominal outer diameter	55	0 / -13	620-2
B	width	13	0 / -120	620-2
rs min.	minimal chamfer dimension	1		625-1
da min.	mounting dimension	34.6		5418
Da max.	mounting dimension	50.4		5418
ra max.	mounting dimension	1		5418

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	14600	430	281	8300	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		8000	

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	5	20

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article 6006 2RS BI2 **Art-No.** 49114

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-66
Cage	St12		
Sealing washers	St12/NBR		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.