general data/description

created: 24.09.2021 / 02 page: 1 / 2

article 2208 K TN 2RS NS7 **Art-No.** 50474

brand SKA **weight/kg** 0.505

remark Y-factors: Y1: Fa/Fr <= e / Y2: Fa/Fr > e / X-factors: X1: Fa/Fr <= e / X2: Fa/Fr > e. Temperature limit due to the seal.


description

2208	Size
K	Conical bore
TN	Plastic cage
2RS	Sealing washers on both sides, touching

greasing

NS7	KYODO YUSHI MULTEMP SRL

dimensions and tolerances

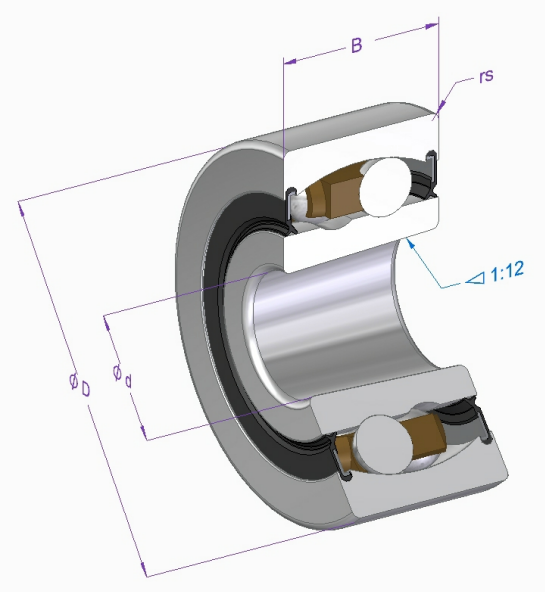

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	40	0 / 39	ISO 492
D	nominal outer diameter	80	0 / -13	620-2
B	width	23	0 / -120	620-2
rs min.	minimal chamfer dimension	1.1		630
e	calculation factor	0.27		281
Y1	calculation factor	2.32		281
Y2	calculation factor	3.6		281
Y0	calculation factor	2.43		76
X1	calculation factor	1		281
X2	calculation factor	0.65		281
X0	calculation factor	1		76

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	18600	387	281	6100	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		6300	

operating temperature	max. [°C]	min. [°C]
	120	-30

bearing clearance	radial min. [µm]	max. [µm]
	19	35

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article 2208 K TN 2RS NS7 **Art-No.** 50474

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-66
Cage	PA66+GF25		
Sealing washers	Sheet steel/NBR		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.