general data/description

created: 04.03.2020 / 01 page: 1 / 2


article GE 30 ES 2RS **Art-No.** 27572 **brand** **weight/kg** 0.14

remark All data according to manufacturer catalog.

description

GE	Design
30	Size
ES	Sliding pair, requiring maintenance
2RS	Sealing washers on both sides, touching

dimensions and tolerances

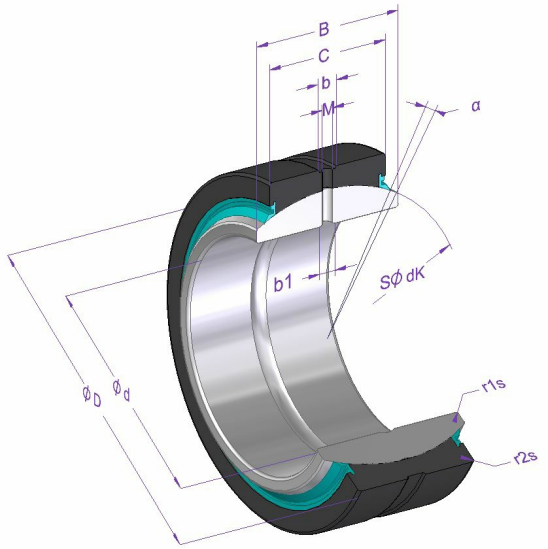

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	30	0 / -10	12240-1
D	nominal outer diameter	47	0 / -11	12240-1
B	inner ring width	22	0 / -120	12240-1
C	outer ring width	18	0 / -240	12240-1
dk	ball diameter	40.7		WERKSMORM
r1s min.	minimal chamfer dimension	0.6		12240-1
r2s min.	minimal chamfer dimension	0.6		12240-1
b	groove width outer ring	3.1		WERKSMORM
b1	groove width inner ring	3.1		WERKSMORM
M	diameter lubrication hole	2		WERKSMORM
alpha	tilt angle	~6°		12240-1

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	62000			310000	

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	50	100

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Sealing washers	NBR		

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article GE 30 ES 2RS **Art-No.** 27572

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.