Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

created: 12.01.2018 / 02 page: 1 / 1


article NATV 6 PP **Art-No.** 32935 **brand** SKA **weight/kg** 0.021

description

NATV	Design
6	Size
PP	Seals on both sides

remark Load ratings calculated according norms for rolling bearings. Also depending on mating track.

dimensions and tolerances

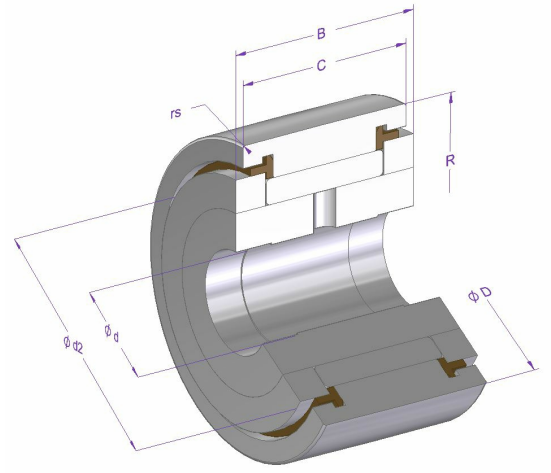

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	6	0 / -8	620-2
D	nominal outer diameter	19	0 / -50	
B	inner ring width	11	0 / -120	620-2
C	outer ring width	12	0 / -180	
d2	axial washer outer diameter	14		
rs min.	minimal chamfer dimension	0.15		620-6
R	radius outer ring	500		

calculation and operating data

load ratings	**dynamic C [N]**	**fatique load limit load Cu [N]**		**DIN/ISO**	**static Co [N]**	**DIN/ISO**
	7460	1420		281	9960	76
speed of rotation limit	**reference n [1/min]**	**grease n [1/min]**	**oil n [1/min]**			
		3100				
operating temperature	**max. [°C]**	**min. [°C]**				
	120	-20				
bearing clearance	**radial min. [µm]**	**max. [µm]**				
	20	45				

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Needle rollers	100Cr6	683-17	58-65
Axial washers	100Cr6	683-17	58-65
Seals	NBR		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.