Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description


created: 13.04.2022 / 01 page: 1 / 1

article NUP 204 E TVP2 **Art-No.** 35252 **brand** SKA **weight/kg** 0.133

description

NUP	Design
204	Size
E	Reinforced version
TVP2	Plastic cage

dimensions and tolerances

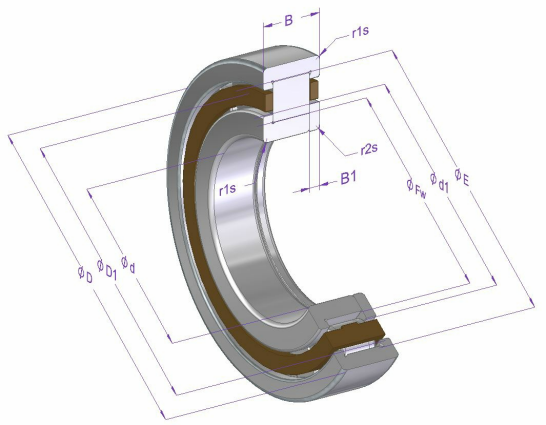

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	Nenndurchmesser Innen	20	0 / -10	620-2
D	Nenndurchmesser Aussen	47	0 / -11	620-2
B	width	14	0 / -120	620-2
Fw	inner enveloping circle diameter	26.5	0 / 10	5412-1
rs1 min.	minimal chamfer dimension	1		5412-1
r2s min.	minimal chamfer dimension	0.6		5412-1
d1	inner shoulder diameter	~29.6		5412-1
D1	outer shoulder diameter	~38.5		
B1	flange width	2.5		5412-1
E	raceway diameter outer ring	41.5		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	27700	3080	281	25100	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		13000	16000

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	20	45

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Cylindrical rollers	100Cr6	683-17	58-65
Cage	PA66 + GF25		
Flange disc	100Cr6	683-17	58-65

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.